

ED-17 Serial Output Magnetic Encoder



- **9-bit absolute encoder**
- **Serial SSI interface**
- **IP52 sealing**
- **Ball bearing**
- **Excellent stability – no optic degradation**
- **Custom housings, shafts, connectors available in most cases with little tooling costs**

DESCRIPTION

The ED-17 magnetic encoder is an absolute encoder with 9-bit resolution. The device can be easily mounted onto an existing shaft. The serial output provides absolute angular position information even when power is cycled. The encoder is designed with modular and flexible construction methods. It can be customized concerning housings, shafts and terminations to meet your specification with little tooling costs.

FEATURES

- Magnetic sensing technology
- Encapsulated electronics/sealed unit
- Digital SSI interface
- Low profile
- Consistent rotational torque
- IP52 sealing
- Metallic threaded bushing mounting
- Industrial temperature range (-40°C to 85°C)
- Excellent stability – no optic degradation
- Custom housings, shafts, connectors available in most cases with little tooling costs

APPLICATIONS

- Marine, avionics position control
- Marine steering
- Pump monitoring and control
- Camera position and control
- XY stage positioning
- Radio controls
- Medical diagnostic equipment
- Valve position
- Throttle position control/feedback

ED-17 Serial Output Magnetic Encoder

PERFORMANCE SPECS ^(NOTE1)

Parameters	ED-17-BB-512-S-P
Supply current	30 mA
Operating voltage (Vcc)	5 Vdc \pm 0.25 Vdc
Resolution	0.7 °
Accuracy	1.4 °
Operating temperature range	-40 - +85 °C
Power-up time	20 ms

Bearing:

Parameters	ED-17-BB-512-S-P
Bearings	Ball
Maximum speed	3000 RPM
Bearing life	30,000,000 cycles

(NOTE1): All specifications are specified with Vcc @ Nominal input voltage, and Ambient Temperature 25 Degrees Celsius.

MECHANICAL

Parameters	ED-17-BB-512-S-P
Axial load (max)	20 N
Radial load (max)	10 N
Shaft end play axial (max)	0.13 mm
Shaft radial play (max)	0.25 mm (15.3 mm from thread)
Shaft push-in force	9 N
Shaft pull-out force	1.3 N
Run out (max)	0.25 mm (19 mm from thread)
Bushing mounting torque	1.1 Nm

ED-17 Serial Output Magnetic Encoder

DIMENSIONS

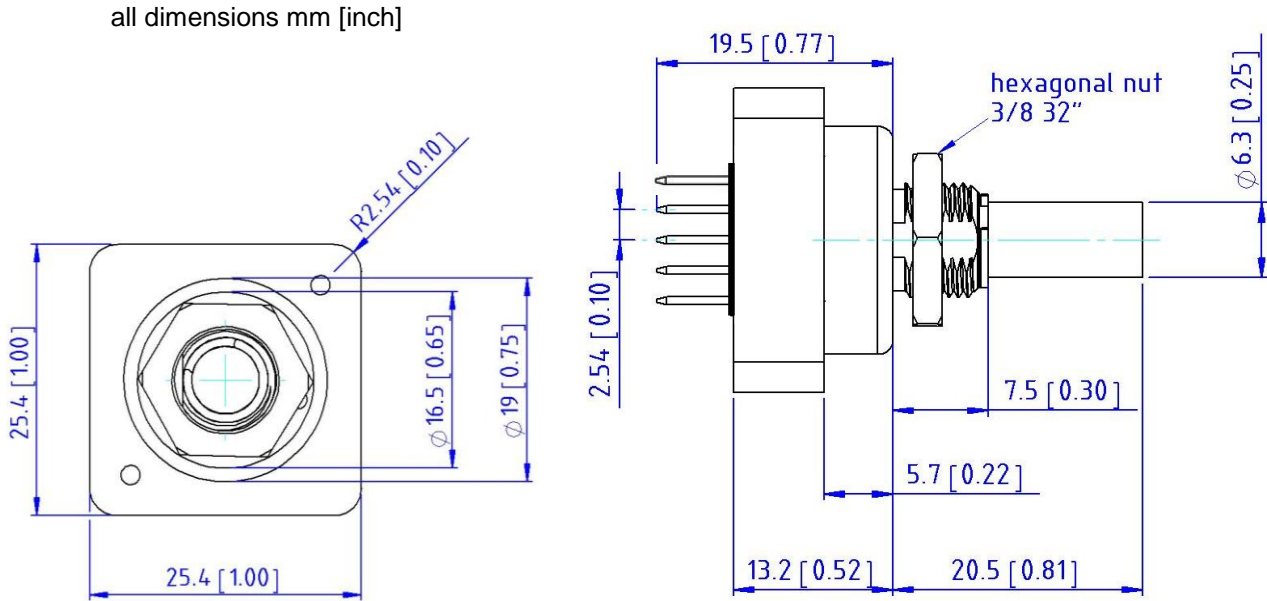


figure 1: Dimensions of the ED-17-BB-512-S-P (top and side view)

ED-17 Serial Output Magnetic Encoder

PINNING

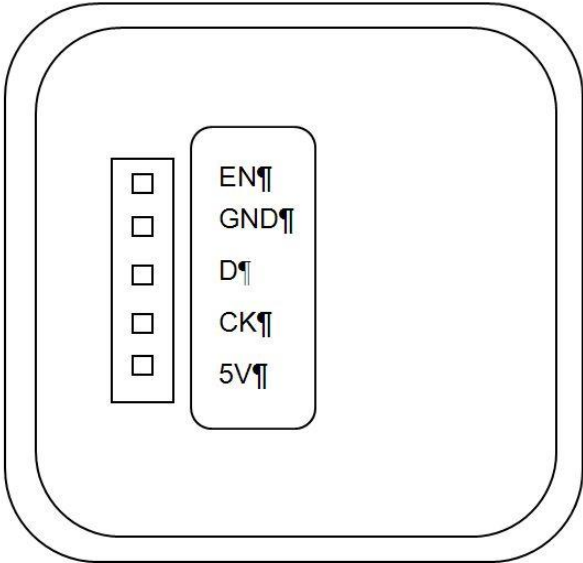


figure 2: Pinning of the ED-17-BB-512-S-P (bottom view)

ED-17 Serial Output Magnetic Encoder

BINARY SYNCHRONOUS SERIAL INTERFACE (SSI)

Parameter	Symbol	Min.	Max.	Unit
Clock period	t_{CL}	1.2	16	μs
Clock high	t_{High}	0.6	15.4	μs
Clock low	t_{Low}	0.6	15.4	μs
Delay time	t_D	16	22	μs

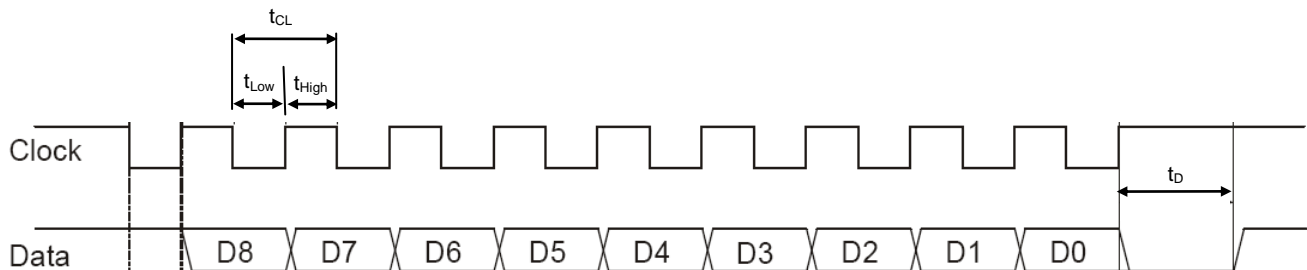


figure 3: SSI timing diagram

The clock signal must always starts from high. At the first low/high transition the encoder transmits the most significant bit (MSB) and at each low/high transition of the clock signal the next data bit is transferred. After sending the least significant bit (LSB) the data line is forced low and before a new position can be read a waiting time of t_D max is required.

The absolute position can be calculated using (1).

$$rotation \ angle = SSIvalue_{decimal} \cdot \left(\frac{360^\circ}{512} \right) \quad (1)$$

ED-17 Serial Output Magnetic Encoder

ENVIRONMENTAL


Vibration	MIL-STD-202F Method 204D Test Condition B
Shock	MIL-STD-202F Method 213B Test Condition C
Humidity	MIL-STD-202F Method 103B Test Condition A
Thermal Shock	MIL-STD-202F Method 107G Test Condition A
Operating Temperature	-40 to +85°C
Storage Temperature	-55 to +125°C

ED-17 Serial Output Magnetic Encoder

ORDERING INFORMATION

PART NUMBERING Model Number+ Bearing+Output resolution+Serial output +Connection

ED-17-BB-512-S-P



Connection
Output
Output Range
Bearing

Options:

P = Pin header
S = Serial output
512 = 9-bit resolution
BB = Ball Bearing

联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000
电话：+86 755 2641 9890 传真：+86 755 2641 9680
电子邮箱：sales@bill-well.com