



Digital Accelerometers User Configurable ± 1 to $\pm 15 g$

Digital Accelerometer

These Measurement Specialties digital accelerometers are complete, easy-to-use, user-configurable sensors containing one to three accelerometers, a temperature sensor, signal processor, RS-485 interface and three analog outputs in a small, easy-to-install package.


No data acquisition system is required; data is streamed directly to a PC. A connection kit is available to set up and begin testing immediately upon receipt of the sensor.

The analog/digital output range and low-pass filter of each digital accelerometer axis can be set via a built-in RS-485 interface using a free, downloadable Instrument Configuration Utility (ICU). An RS-485 to RS-232 adapter is available.

Calibrated, ranged and filtered data can be streamed out at up to 3 Mbit/ sec via RS-485. Analog output of up to three calibrated, ranged and filtered channels are provided for compatibility with existing systems.




dimensions

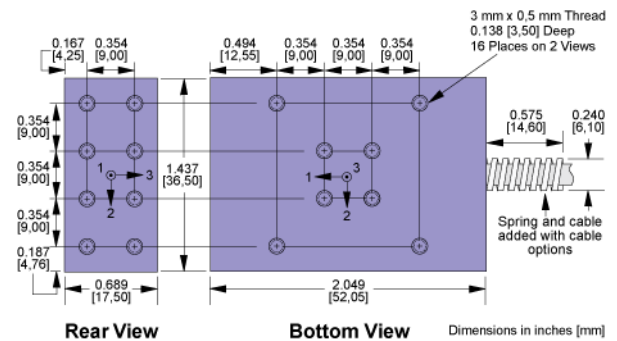


Two through holes and four 3 mm x 0.5 mm threaded holes are provided for mounting.

Mounting adapters (sold separately)



35170A Horizontal



35172A Vertical

FEATURES

- User Configurable Settings
- RS485 Serial and Analog Outputs
- High Accuracy and Linearity over Wide Temperature Range
- Built-in Calibration Data
- Built-in Power Supply Regulation
- Easy Installation
- Suitable for Harsh Environments
- DO-160 Version Available
- Three Year Warranty

APPLICATIONS

- Vehicle dynamics
- Construction Equipment
- Research & Development
- Test & Measurement
- Military/Aerospace

connections



Pin	1	2	3	4	5	6	7	8	9
Signal Wire	Analog1+ Brown	Analog2+ Red	Analog3+ Orange	Signal- Yellow	RS485- Green	RS485+ Blue	Aux Violet	+Vs Grey	Gnd White

15203B/25203B /35203B Accelerometer



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

performance specifications

$T_A = T_{min}$ to T_{max} ; Acceleration = 0 g unless otherwise noted; within one year of calibration. Improved specifications available upon request.

PARAMETERS	Min	Typical	Max	Units	Conditions/Notes
Range: Measurement Full Scale					On each axis, user configurable
Option R015			±15	g	
Option R006			±6	g	
Sensitivity Drift 25°C to T_{min} or T_{max}		±0.65		%	Percent of sensitivity at 25 °C
Zero g Drift 25°C to T_{min} or T_{max}		±60		mg	Repeatable, can be compensated
Alignment		±1.0	±3.0	degrees	Deviation from ideal axes
Transverse Sensitivity		±0.25		%	Inherent sensor error, excluding misalignment
Nonlinearity		0.1		% FSR	Best fit straight line
Frequency Response	0		800	Hz	Lower filter cutoffs are user configurable*
Noise Density		120		µg/√Hz	$T_A = 25$ °C
Temperature Sensor					
Range	-55		125	°C	
Resolution		0.25		°C	
Accuracy		±2.0	±3.5	°C	$T_A = -40$ to $+85$ °C
Digital Signal Processor					
Internal Word Size			32	bits	
Sensor Scan Rate		15,000	42,500	Hz	User configurable; channels processed in parallel
Analog Outputs**					
Configurable to sensor					
Voltage Swing	0.25		4.75	V	$I_{out} = 5$ mA
Impedance to Analog -	100	130	220	Ω	
Nonlinearity			0.15	% FSR	Excluding sensor nonlinearity
Digital Output Word Size					
16 bits, Filtered, gained and calibration corrected					
Power Supply (V_s)					
Input Voltage Limits	-80		+80	V	-80 V continuous, >38 V if ≤550 ms, duty <1%
Input Voltage – Operating	+8.5		+36	V	Continuous
Input Current		50		mA	
Rejection Ratio	80	120		dB	DC
Temperature Range (T_A)	-40		+85	°C	Terminal block option T000 rated to -30 °C
Mass					
78 grams					
Shock Survival – Sensor	-1500		+1500	g	Any axis for 0.5 ms, limited by oscillator

*User configurable low-pass filter 3dB cutoff (number poles configurable)

**Each channel's offset and gain are configurable

ordering info

