

# LDM-1000 – LVDT/RVDT Signal Conditioning Module



- 10 to 30VDC operation
- Standard DIN rail form factor
- 4 to 20mA and VDC outputs
- Zero, span and phase adjustable
- 2.5, 5 and 10kHz excitation frequencies
- Low noise, 3-pole Butterworth filter
- Master/slave capability
- Compatible with 4, 5 & 6-wire LVDTs/RVDTs
- Works with very low input impedance LVDTs and RVDTs

## DESCRIPTION

The **LDM-1000** is an extremely versatile and popular LVDT/RVDT signal conditioning module and the perfect choice for industrial applications requiring the DIN standard rail mount. The LDM-1000 provides everything you will need for accurately interfacing an AC operated Linear or Rotary Variable Differential Transformer to your industrial position control system.

The LDM-1000 was designed with maximum sensor/system compatibility in mind. A wide range of gains, excitation voltages and frequencies ensure compatibility with virtually all LVDT and RVDT type transducers. A full-wave synchronous demodulator eliminates quadrature and harmonics to maximize external noise rejection.

The LDM-1000 also provides several different input/output options to accommodate varying PLC and analog I/O requirements:

- ✓ Single-ended voltage outputs with the use of 100% zero suppression to maximize the sensor stroke utilization while simplifying programming (no need to deal with sign)
- ✓ Bipolar voltage output to maximize A/D bit usage with most PLC analog input modules, for applications requiring high resolution
- ✓ 4-20mA current output for applications requiring long signal runs or where noise immunity may be an issue. The 4-20mA loop is driven by an internal power supply, provided by the LDM-1000.

Finally, the frequency response is internally selectable and so is the master/slave function which allows synchronization of multiple LDM-1000 modules to prevent beat frequencies and cross talk between transducers.

Also see our other LVDT/RVDT signal conditioner models:

<b>LVM-110</b>	±15VDC supply, ±10 and 0 to 10VDC outputs, open circuit board
<b>LiM-420</b>	24VDC supply, 4-20mA (3-wire) output, open circuit board
<b>ATA-2001</b>	Line powered, DC voltage and current outputs, push-button programmable
<b>IEM-422</b>	Line powered, 4-20mA output, NEMA-13 rated enclosure
<b>PML-1000</b>	AC or DC supply, DC voltage, current and RS485 outputs, 1/8 <sup>th</sup> DIN panel meter,
<b>MP-2000</b>	Line-powered, analog DC & RS232 outputs, ¼ DIN, dual channel set point controller with bit-mapped display

*Measurement Specialties acquired Schaevitz Sensors and the **Schaevitz™** trademark in 2000.*

# LDM-1000 – LVDT/RVDT Signal Conditioning Module

## FEATURES

- Standard DIN rail form factor
- Voltage and current output signals
- Phase correction
- Status LED's for power and loop integrity
- Multiple LVDT master/slave capability

## APPLICATIONS

- Gas and steam turbine control systems
- Process control systems
- Reeler/dereeler control systems
- Automotive test track instrumentation
- Paper head box control

## PERFORMANCE SPECIFICATIONS

ELECTRICAL SPECIFICATIONS	
Supply voltage	18 to 30VDC or 10 to 18VDC ( <i>jumper selectable, 18 to 30VDC as shipped</i> )
Supply current	65mA maximum
Output types and ranges	$\pm 5$ VDC, 0 to 5VDC, 0 to 10VDC, and 4 to 20mA ( <i>DIP switch selectable, <math>\pm 5</math>VDC as shipped</i> )
Temp. coefficient of output	$\pm 0.02\%$ of FSO per degree F [ $\pm 0.036\%$ of FSO per degree C] over operating temp. range
Voltage output noise & ripple	5mV RMS maximum
Current output noise & ripple	25 $\mu$ A RMS maximum
Current loop resistance	700 $\Omega$ maximum
Frequency response	250 or 1000Hz @ -3 dB ( <i>3-pole Butterworth, DIP switch selectable, 250Hz as shipped</i> )
Non-linearity	$\pm 0.02\%$ of FSO
Transducer excitation	
Voltage	1 or 3 VRMS ( <i>DIP switch selectable; 3VRMS as shipped and with 18 to 30VDC supply voltage only</i> )
Current	25mA RMS
Frequency	2.5, 5 or 10kHz ( <i>DIP switch selectable, 2.5kHz as shipped</i> )
Transducer requirements	
Transducer type	LVDT or RVDT with 4, 5 or 6 electrical connections
LVDT/RVDT input impedance	50 $\Omega$ minimum @ 1 VRMS excitation ; 150 $\Omega$ minimum @ 3 VRMS

ENVIRONMENTAL AND MECHANICAL SPECIFICATIONS	
Operating temperature range	-13°F to +185°F [-25°C to 85°C]
Storage temperature range	-67°F to +257°F [-55°C to 125°C]
Mounting	Standard DIN-3 rail mount
Size	3.90 [99.0] high x 0.89 [22.5] wide x 4.51 [114.5] Deep
Wire terminal size	24 to 12 AWG [0.2 to 2.5mm]

### Notes:


All values are nominal unless otherwise noted

Dimensions are in inch [mm]

FSO (Full Scale Output) is the largest absolute value of the outputs measured at the range ends

# LDM-1000 – LVDT/RVDT Signal Conditioning Module

## DIMENSIONS AND INTERNAL VIEW

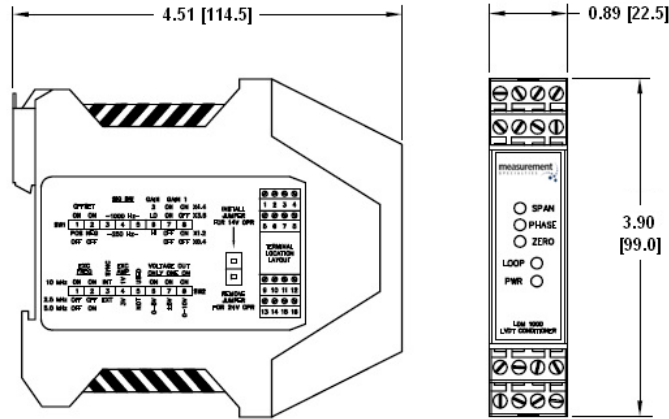

Dimensions are in inch [mm]

## ORDERING INFORMATION

Description	Part Number
LDM-1000 Signal Conditioning Module	02291333-000
DC power supply (15VDC), Model PSD 40-15	02291339-000
Cable to connect HCA/HCI/GCA/R36AS to LDM-1000, <b>200°C [392°F]</b> (PT06A-10-6S to Stripped/Tinned) (1)	04290595-000
Extension cable to connect LBB (option -001) to LDM-1000 (PT06A-10-6S to Stripped & Tinned) (1)	04290596-000

(1) All cables are shielded, 10 foot long, and rated 80°C [176°F] operating unless otherwise noted. Consult factory for other lengths.

## 联系方式



深圳市亿为测控电子有限公司  
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com