

RVIT 15-60 & 15-120i – Rotary Variable Inductance Transducers



- DC operation
- Non-contact design
- Infinite resolution
- Up to 120 degree sensing range
- ± 3 VDC ratiometric or 4-20mA output
- $\pm 0.25\%$ linearity
- Size 15 servo or flange mount
- Anodized aluminum housing

DESCRIPTION

The **RVIT 15-60** and **RVIT 15-120i** are DC operated, non-contact, angular position sensors featuring MEAS proprietary RVIT (Rotary Variable Inductance Transducer) technology. Operating from a single rail DC voltage supply, they provide either a ± 3 VDC (RVIT 15-60) or 4-20mA (RVIT 15-120i) output, over a 120 degree angular sensing range.

The RVIT design utilizes a set of four printed circuit coils and a light-weight conductive spoiler to achieve superior performance with a low moment of inertia. During operation, the light weight spoiler rotates with the transducer shaft, differentially altering the inductance of the printed circuit planar coils. The resulting unbalance is precisely measured using a patented autoplex circuit. This signal is then converted to a linear DC output voltage, proportional to the angle of the rotor shaft. The digital circuit is extremely resistant to environmental disturbances such as EMI and RFI, and is compatible for use with most analog position feedback systems.

The RVIT 15-60 and RVIT 15-120i offer exceptional performance at a competitive price along with the interfacing flexibility of the ± 3 VDC and 4-20 mA outputs. The RVIT 15-60 emulates a potentiometer in that the output voltage is ratiometric to the supply voltage, within the limits of the specification. Other standard features include a wide operating temperature range, infinite resolution, and an extremely long rotational life. For higher volume applications, specialized options include **special angular sensing ranges, and custom unipolar or bipolar output voltage scaling**.

Also see our other DC operated, angular position sensor models, **R60D** (bipolar DC operation, servo size 11 RVIT), **R120LC** (5VDC operation, low cost RVIT) and **R30D** (bipolar DC operated RVDT).

MEAS acquired Schaevitz Sensors and the **Schaevitz™** trademark in 2000.

FEATURES

- Extremely long rotational life
- Internal voltage regulation
- Shielded ABEC 3 precision bearings
- Rugged aluminum housing
- Flange mount with shaft seal (*optional*)

APPLICATIONS

- Ball valve position
- Throttle level feedback
- Rotary actuator feedback
- Dancer arm position
- Reeler / Dereeler

RVIT 15-60/15-120i – Rotary Variable Inductance Transducers

PERFORMANCE SPECIFICATIONS

| ELECTRICAL SPECIFICATIONS | | |
|----------------------------|---|---|
| Parameter | RVIT 15-60 | RVIT 15-120i |
| Angular range | ±60 degrees | 0 to 120 degrees |
| Input voltage | 4.0 to 5.5VDC | 10 to 28VDC (<i>not to exceed 30VDC</i>) |
| Input current | 14mA | 41mA |
| Sensitivity (*) | 10 mV/V/degree | 0.133 mA/degree |
| Output at range ends (*) | ±3.0VDC | 1 to 5VDC (<i>with 250 Ohm loop resistor</i>) |
| Output current | 2mA | 4 to 20mA |
| Output impedance | 1Ω maximum | 250Ω maximum |
| Temp coefficient of output | ±0.02% of FSO per °F [0.036% of FSO per °C], over operating temperature range | |
| Non-linearity | ±0.25% of FR | |
| Repeatability & hysteresis | 0.1% of FRO maximum | |
| Frequency response | 25Hz @ -3dB | |

| ENVIRONMENTAL AND MECHANICAL SPECIFICATIONS | |
|---|--|
| Temperature range | 0°F to +170°F [-18°C to 77°C] Operating; -67°F to +257°F [-55°C to 125°C] Storage |
| Mechanical angular range | 360 degrees (no stops) |
| Bearings | ABEC 3 precision, matched and preloaded |
| Shaft diameter | 3/16 inch [4.76mm] |
| Housing material | Aluminum, black anodize |
| Mounting | Size 15 servo mount BU-ORD (standard) or Flange mount with shaft seal (with accessory) |
| Maximum torque | 0.12 inch.ounce-force [8.6 gram-force.cm] |
| Shaft load capability | 10 lb [4.5Kg] Axial and Radial |
| Electrical connection | 3 conductor cable, AWG 26, under PVC jacket, 12 inches [30cm] long |
| Weight | 2.5 oz [70grams] |

Notes:

All values are nominal unless otherwise noted

FR (Full Range) is the angular range, end to end; $2 \times A^\circ$ for $\pm A^\circ$ angular range, A° for a 0 to A° range


FSO (Full Scale Output): Largest absolute value of the outputs measured at the ends of the range

FRO (Full Range Output): Algebraic difference in outputs measured at the ends of the range


(*) Ratiometric to input voltage

RVIT 15-60/15-120i – Rotary Variable Inductance Transducers

WIRING INFORMATION

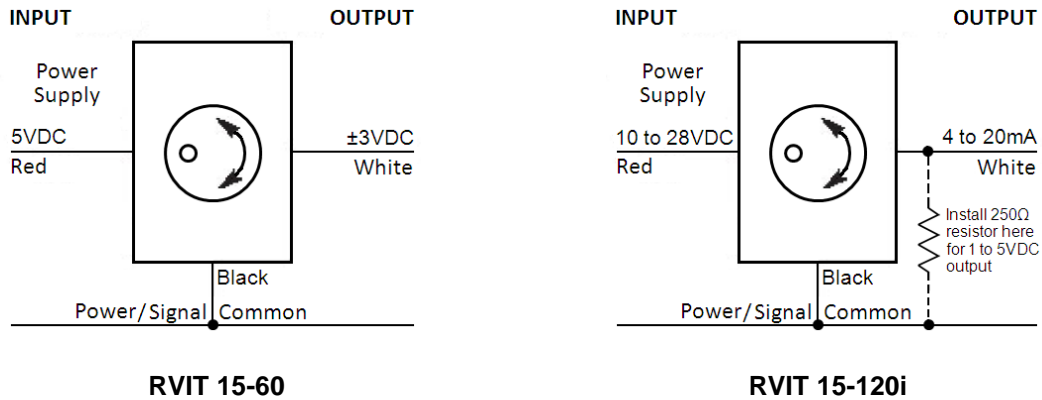

DIMENSIONS

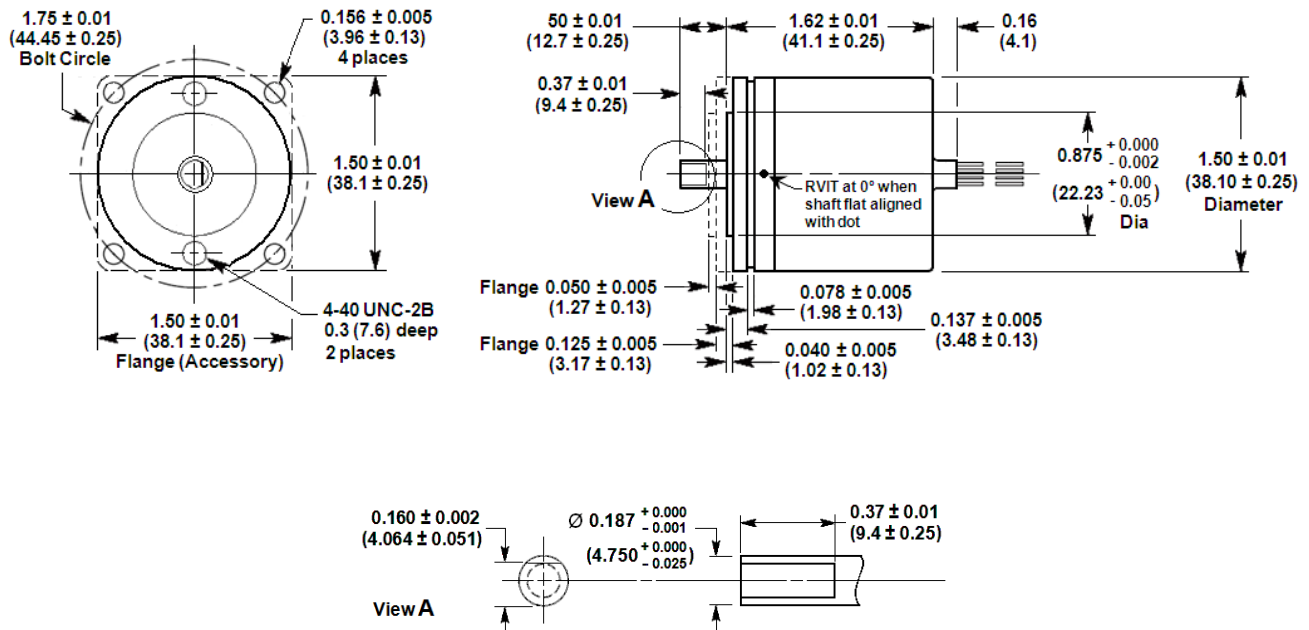

Dimensions are in inch (mm)

RVIT 15-60/15-120i – Rotary Variable Inductance Transducers

ORDERING INFORMATION

| Description, standard | Model | Part Number |
|--|--------------|--------------|
| RVIT ± 60 degree range, ± 3 VDC ratiometric output | RVIT 15-60 | 02180000-060 |
| RVIT 0 to 120 degree range, 4-20mA output | RVIT 15-120i | 02181600-120 |

| Description, custom versions | Model | Part Number |
|--|----------------------------|--------------|
| RVIT 0 to 80 degree range, 4-20mA output | RVIT 15-80i | 03181600-080 |
| RVIT 0 to 80 degree range, 20-4mA output | RVIT 15-80i Negative Slope | 03181700-080 |
| RVIT 0 to 90 degree range, 4-20mA output | RVIT 15-90i | 73180003-000 |

For the above custom versions or others, consult factory for minimum quantity, pricing, and availability.

| ACCESSORIES | | |
|--|-----------|--------------|
| R-FLEX multipurpose coupling kit | R-FLEX | 66530072-000 |
| Flange Mount for RVIT 15 | | 04180029-001 |
| DC power supply (15VDC) for RVIT 15-120i | PSD 40-15 | 02291339-000 |

联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000
电话：+86 755 2641 9890 传真：+86 755 2641 9680
电子邮箱：sales@bill-well.com