


# DPL/DPN-Series Inclinometer

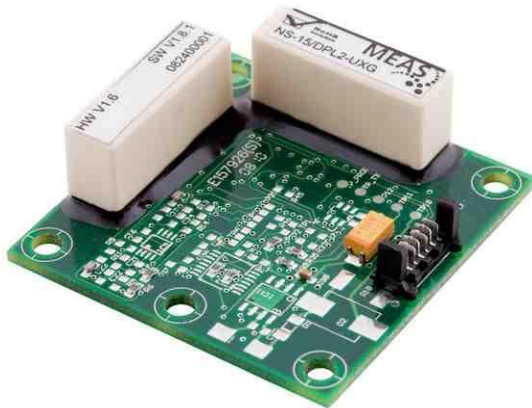

- Dual axis inclinometer module
- Measurement range  $\pm 2^\circ$  up to  $\pm 30^\circ$
- Digital and analogue output signal
- High accuracy
- Digital filtering
- OEM use

## DESCRIPTION

The **DPL/DPN-Series** is modern SMD technology based small board-level dual axis inclinometer applying conductive technology. A high-speed microcontroller implements linearization and temperature compensation routines, thus providing excellent accuracy over the full operating temperature range. The DPL / DPN series inclinometer is available with both fully compensated digital output TTL/RS 232 and/or analogue voltage output 0.3 to 4.7V. A programmable digital software filter allows the reduction of shock- and vibration influences during operation for optimal measurement results.

## FEATURES

- PCB level
- High accuracy
- Fast response time
- High resolution
- Digital output RS 232
- Analogue output 0.3...4.7V
- Programmable digital filtering to minimized influences of shock and vibration
- Programmable zero point, output rate, etc.

## APPLICATIONS

- Platform leveling
- Road construction machines
- Drilling machines
- Weighing systems
- Mobile and stationary cranes
- Hydraulic leveling
- Building control
- Wind power

# DPL/DPN-Series Inclinometer


## PERFORMANCE SPECIFICATIONS

	Conditions	Min	Type	Max	Unit
Measurement ranges		-2,-5,-10-15,-30		+2,+5,+10,+15+30	°
Resolution			0.001		°
Accuracy (absolute), type 2°	Ta = +25°C, -40°C ...+85°C	0.05		0.15	°
Accuracy (absolute), type 5°	Ta = +25°C, -40°C ...+85°C	0.05		0.15	°
Accuracy (absolute), type 10°	Ta = +25°C, -40°C ...+85°C	0.06		0.15	°
Accuracy (absolute), type 15°	Ta = +25°C, -40°C ...+85°C	0.06		0.25	°
Accuracy (absolute), type 30°	Ta = +25°C, -40°C ...+85°C	0.17		0.8	°
Offset temperature drift error	Ta = +25°C		0.05		°
Digital output rate (1)	TTL,RS232,SPI	0.5	10	25	Hz
Noise RMS			0.001		°
Analogue voltage output		0.3		4.7	V
Current consumption			8	15	mA
Power supply (2)	DPL2 series		5		VDC
Power supply (3)	DPN2 series	7		30	VDC
Operation temperature range		-40		+85	°C
Storage temperature range		-40		+85	°C
Weight			20		g
Dimensions (4)	W x D x H		45 x 45	x 14(20)	mm

- (1) programmable
- (2) only for series NS-xx/DPL2-xxx
- (3) only for series NS-xx/DPN2-xxx
- (4) H=20mm the 30° unit only

# DPL/DPN-Series Inclinometer

## DIMENSIONS [MM]

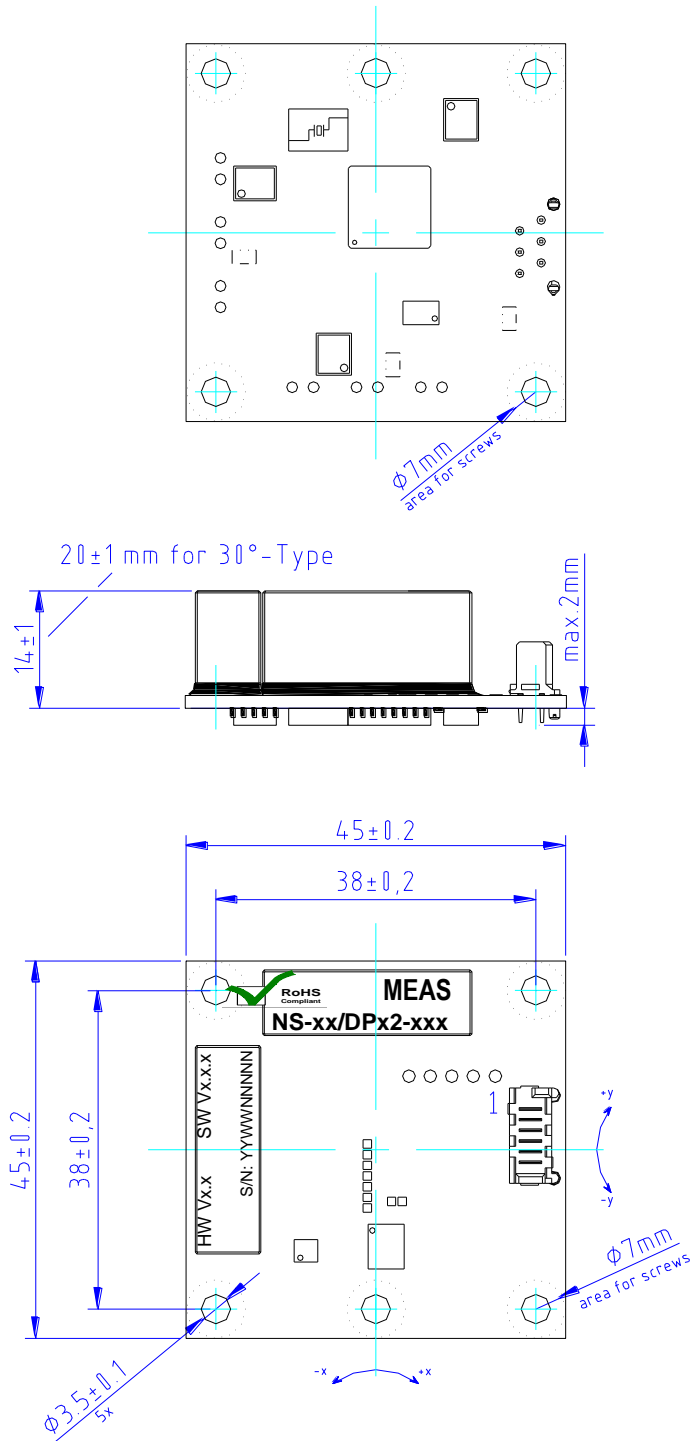


# DPL/DPN-Series Inclinometer

## PINNING - UNIT WITH UART /TTL INTERFACE

### Unit NS-xx/DPL2-Uxx

Pin	Name	Description	Type
1	Vcc	Positive power supply <b>+5VDC</b>	Supply , input
2	RxD	UART input signal (TTL-level)	Input 1
3	GND	Negative power supply, ground output signal analogue/digital	Supply , input
4	N.C.	Not connected	-
5	N.C.	Not connected	-
6	TxD	UART output signal (TTL-level)	Output 1

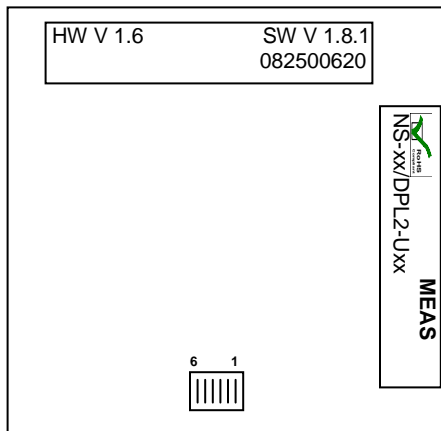


Surface view, Top level

For more details please use the product specification / application note / instruction manual.

## PINNING - UNIT WITH RS 232 INTERFACE AND ANALOGUE OUTPUT

### Unit NS-xx/DPN2-Rxx

Pin	Name	Description	Type
1	Vcc	Positive power supply <b>+7...30VDC</b>	Supply , input
2	RxD	RS232 input signal	Input 1
3	GND	Negative power supply, ground output signal analogue/digital	Supply , input
4	VoutX	Analogue output signal X-axis	Output 2, X
5	VoutY	Analogue output signal Y-axis	Output 2, Y
6	TxD	RS 232 output signal	Output 1

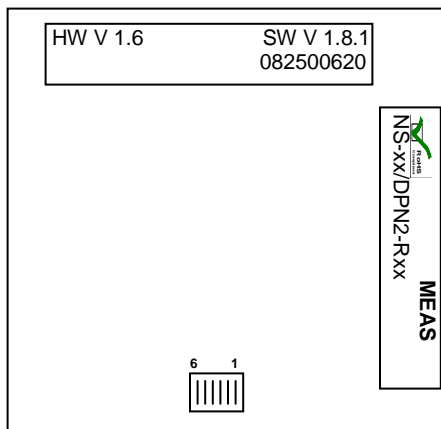

Surface view, Top level

For more details please use the product specification / application note / instruction manual.

# DPL/DPN-Series Inclinator

## ORDERING INFORMATION

PART NUMBERING	UNIT	SHORT DESCRIPTION
G-NSDPL2-007	NS- 2/DPL2-UXD	Range +/-2°, Vcc +5 VDC, output TTL-level (UART)
G-NSDPL2-021	NS- 2/DPL2-SXD	Range +/-2°, Vcc +5 VDC, output SPI
G-NSDPL2-008	NS- 2/DPN2-RXD	Range +/-2°, Vcc +7...30 VDC, output RS 232
G-NSDPL2-022	NS- 2/DPN2-RUD	Range +/-2°, Vcc +7...30 VDC, output RS 232, 0.3...4.7V
G-NSDPL2-009	NS- 5/DPL2-UXD	Range +/-5°, Vcc +5 VDC, output TTL-level (UART)
G-NSDPL2-023	NS- 5/DPL2-SXD	Range +/-5°, Vcc +5 VDC, output SPI
G-NSDPL2-010	NS- 5/DPN2-RXD	Range +/-5°, Vcc +7...30 VDC, output RS 232
G-NSDPL2-024	NS- 5/DPN2-RUD	Range +/-5°, Vcc +7...30 VDC, output RS 232, 0.3...4.7V
G-NSDPL2-004	NS- 10/DPL2-UXG	Range +/-10°, Vcc +5 VDC, output TTL-level (UART)
G-NSDPL2-016	NS- 10/DPL2-SXG	Range +/-10°, Vcc +5 VDC, output SPI
G-NSDPL2-005	NS- 10/DPN2-RXG	Range +/-10°, Vcc +7...30 VDC, output RS 232
G-NSDPL2-025	NS- 10/DPN2-RUG	Range +/-10°, Vcc +7...30 VDC, output RS 232, 0.3...4.7V
G-NSDPL2-003	NS- 15/DPL2-UXG	Range +/-15°, Vcc +5 VDC, output TTL-level (UART)
G-NSDPL2-017	NS- 15/DPL2-SXG	Range +/-15°, Vcc +5 VDC, output SPI
G-NSDPL2-006	NS- 15/DPN2-RXG	Range +/-15°, Vcc +7...30 VDC, output RS 232
G-NSDPL2-026	NS- 15/DPN2-RUG	Range +/-15°, Vcc +7...30 VDC, output RS 232, 0.3...4.7V
G-NSDPL2-011	NS- 30/DPL2-UXN	Range +/-30°, Vcc +5 VDC, output TTL-level (UART)
G-NSDPL2-001	NS- 30/DPL2-SXN	Range +/-30°, Vcc +5 VDC, output SPI
G-NSDPL2-012	NS- 30/DPN2-RXN	Range +/-30°, Vcc +7...30 VDC, output RS 232
G-NSDPL2-027	NS- 30/DPN2-RUN	Range +/-30°, Vcc +7...30 VDC, output RS 232, 0.3...4.7V
G-NSMIS-014	Connector,cable	Connector, 6 pin, 20 cm ribbon cable DPL/DPN-series

## 联系方式



深圳市亿为测控电子有限公司  
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com