


G-Series Inclinometer

Single axis inclinometer
Measurement range +/-10°
Switch output



The G-Series consist of a single axis conductive tilt sensor on a modern technology in environmentally protected and robust aluminum housing. The fast microcontroller works with a linearization and temperature compensation routines. This fully calibrated inclinometer offers a switch output signals. The inclination switch enables the angle of inclination of objects such as appliances, machines or motor vehicles to be monitored and emits an alarm signal when the angle is exceeded. The switch threshold can be set symmetrically by the customer in a range of +/-10°.

dimensions [mm]

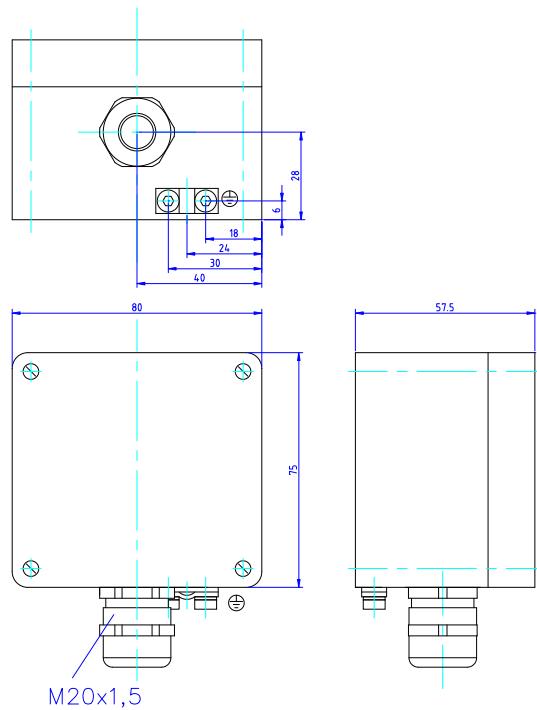

FEATURES

- Robust housing
- High accuracy
- Protection class IP 67
- Wall mounted
- Simple clamp
- EMC Protection

APPLICATIONS

- Building construction machines
- Building control
- Mobile and stationary cranes
- Forklift
- Alarm switch



G-Series Inclinometer

performance specifications

PARAMETERS

	Conditions	Min	Typ	Max	Units
Measurement range		-10		+10	°
Resolution		0.001			°
Switch threshold adjustable	Single step 0.1	0.1		9.9	°
Precision	T=25°C	-0.1		+0.1	°
Precision (absolute)	T=-25...+85°C	-0.25		+0.25	°
Switch output	load	10	50		mA
Switch voltage		+0.1		+140	VDC
Switch hysteresis		0.05		0.15	°
Terminal strip		0.08		2.5	mm ²
metric screw	Diameter M20, cable ø	8	12		mm
Voltage supply		+14.4		+30	VDC
Current consumption		15	20		mA
Operating temperature		-25		+85	°C
Storage temperature		-40		+85	°C
Protection class IP		67			IP
Weight		380			g
Dimensions	W x D x H	80 x 57 x 75			mm

Pinning:

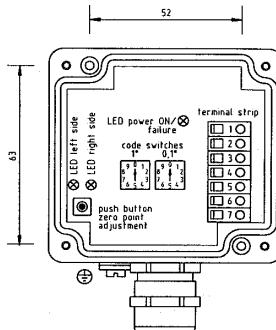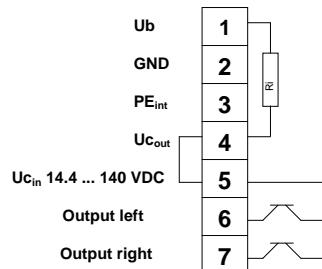

For more details please use the product specification / application note / instruction manual.

ordering info

PART NUMBERING	UNIT	SHORT DESCRIPTION
G-NSG-001	NS-10/G	single axis, range +/-10°, Vcc 14.4...30VDC, switch output

联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话 : +86 755 2641 9890 传真 : +86 755 2641 9680

电子邮箱 : sales@bill-well.com