

# Model 834 Accelerometer

## Triaxial Piezoelectric Accelerometer

<4 $\mu$ A Current Consumption

Full Signal and Power Conditioning  
Circuit Board Mountable



**The Model 834** is a low cost, board mountable triaxial accelerometer designed for high amplitude embedded shock applications. The accelerometer features a maximum current consumption of 4 micro-amps and incorporates full power and signal conditioning. The model 834 is available in  $\pm 2000g$  to  $\pm 6000g$  ranges and provides a flat frequency response up to 2kHz. The model 834M1 provides an extended frequency range to 6kHz.


### FEATURES

- $\pm 2000g$  to  $\pm 6000g$  Dynamic Range
- Low Cost Triaxial
- Hermetically Sealed
- Piezo-ceramic Crystals
- $-20^{\circ}$  to  $+80^{\circ}C$  Operating Range
- $-40^{\circ}$  to  $+125^{\circ}C$  Available on 834M1
- Single Axis Configurations Available

### APPLICATIONS

- Asset Monitoring
- Impact Testing
- System Wake-Up Switch
- Embedded Applications
- Instrumentation

### dimensions

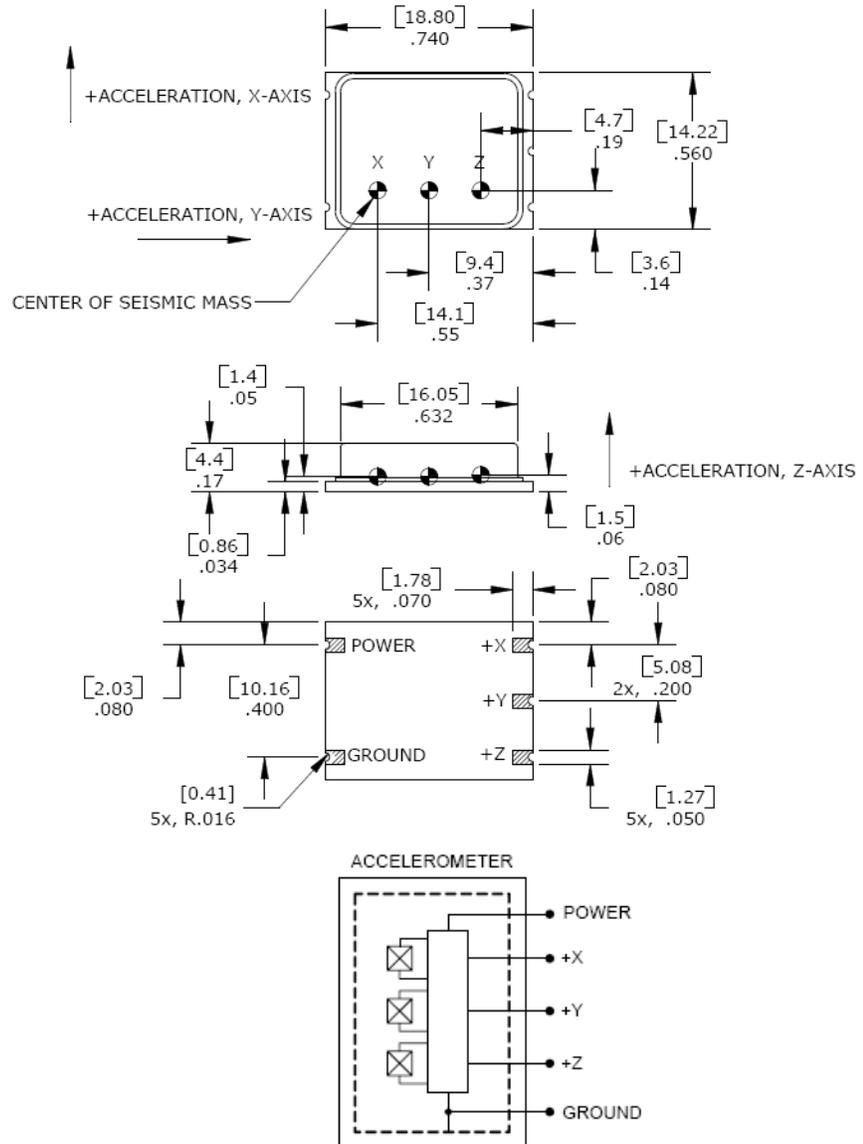

# Model 834 Accelerometer

## performance specifications

All values are typical at +24°C, 100Hz and 3.3Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice.

### Parameters

#### DYNAMIC

			Notes
Range (g)	±2000	±6000	
Sensitivity (mV/g)	0.62	0.20	±30%
Frequency Response (Hz) <sup>1</sup>	2-2000	2-2000	±2dB
Natural Frequency (Hz)	>30000	>30000	
Non-Linearity (%FSO)	±2	±2	
Transverse Sensitivity (%)	<8	<8	
Shock Limit (g)	10000	10000	

#### ELECTRICAL

	Exc Voltage / 2	Exc Voltage / 2	
Bias Voltage (Vdc)	<4	<4	
Total Supply Current (µA)	<4	<4	
Excitation Voltage (Vdc) <sup>3</sup>	3.0 to 5.5	3.0 to 5.5	
Output Impedance (Ω)	<100	<100	
Insulation Resistance (MΩ)	>100	>100	
Broadband Noise (µV)	110	52	@100Vdc
Spectral Noise (mg/√Hz)	6.5	7.5	@ 10Hz
Spectral Noise (mg/√Hz)	1.3	2.5	@ 100Hz
Spectral Noise (mg/√Hz)	0.8	2.0	@ 1000Hz
Shielding	100%		
Ground Isolation	Isolated from Mounting Surface		

#### ENVIRONMENTAL

Temperature Response (%)	-10/+20 from -20°C to +80°C
Operating Temperature (°C)	-20 to +80
Storage Temperature (°C)	-20 to +80

#### PHYSICAL

Sensing Element	Ceramic (shear mode)
Case Material	Ceramic Base, Nickel Silver Cover
Weight (grams)	2.6

<sup>1</sup> A wider frequency response of 2-6000Hz is available on model 834M1

<sup>2</sup> The model 834 is not to be reflow soldered, manual soldering is recommended. See application note.

<sup>3</sup> The model 834 can be operated with 2.8V excitation but the full-scale range will be limited.

**Calibration supplied:** CS-SENS-0100 NIST Traceable Amplitude Calibration at 100Hz

**Wiring color code:** See schematic

## ordering info

PART NUMBERING Model Number+Range

834-GGGG  
|  
| \_\_\_\_\_ Range (2000 is 2000g)

Example: 834-2000  
Model 834, 2000g

## 联系方式



深圳市亿为测控电子有限公司  
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com

www.bill-well.com

深圳市亿为测控电子有限公司