

# Model 52F Accelerometer



Small Size, Aluminum Housing  
 Low Noise, Jacketed Cable  
 ±50g to ±2000g Range  
 Silicon MEMS Technology  
 High Over Range Protection




The **Model 52F** accelerometer has an advanced piezoresistive MEMS sensing element which offers excellent dynamic range and stability. This unit features a full bridge output with an operating temperature range from -40 to +90°C. A slight amount of gas damping provides outstanding shock survivability and a flat amplitude response to 7kHz.

## FEATURES

- 2-10 Vdc Excitation
- Measures Static Acceleration
- ±5,000 g's Shock Protection
- Transverse sensitivity <3%
- Weight <1.0 grams
- 26kHz Resonant Frequency
- Linearity ±1%

## APPLICATIONS

- Automotive crash testing
- High impact research
- Biomechanical studies
- Blast testing

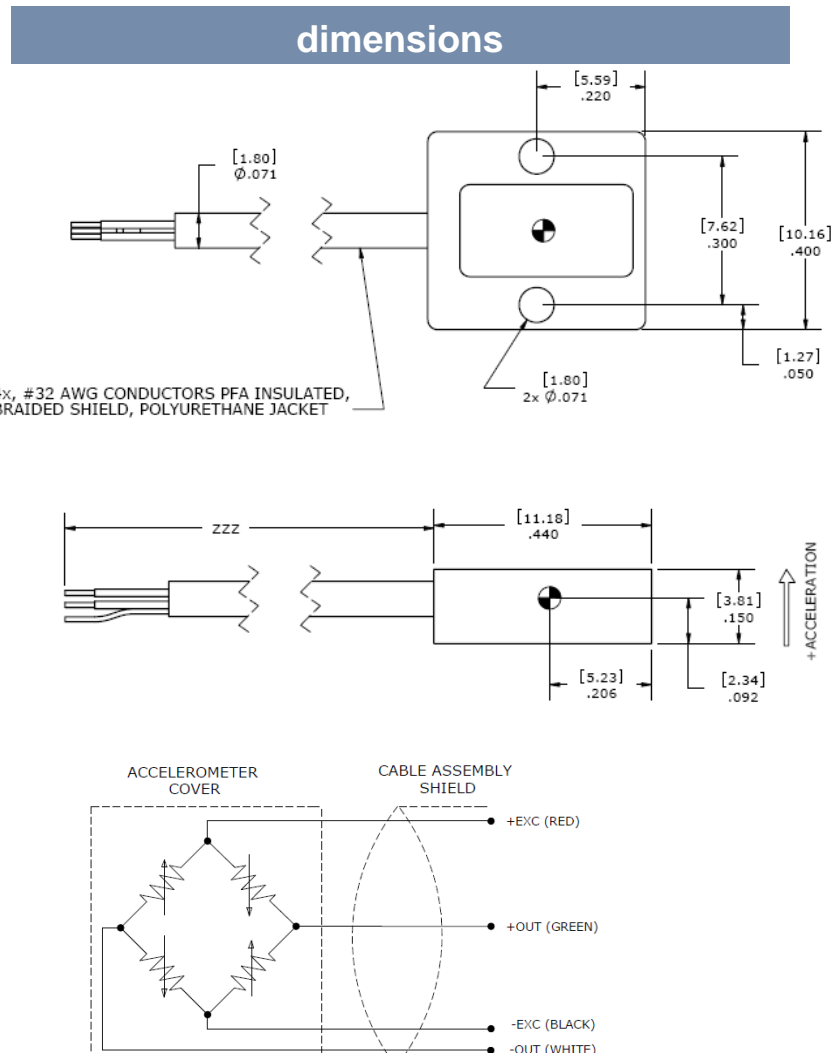

# Model 52F Accelerometer

## performance specifications

All values are typical at  $\pm 24^{\circ}\text{C}$ , 100 Hz and 10 Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice. Standard product parameters are described in PSC-1004 for Plug & Play DC Accelerometers.

### Parameters

#### DYNAMIC

	$\pm 50$	$\pm 200$	$\pm 500$	$\pm 2000$	Notes
Range(g)	2	0.9	0.4	0.15	
Sensitivity (mV/g) <sup>1</sup>	2	0.9	0.4	0.15	
Frequency Response (Hz)	0-1000	0-1400	0-2000	0-4500	$\pm 5\%$
	0-1400	0-1900	0-2800	0-6000	$\pm 1\text{dB}$
Resonant Frequency (Hz)	4000	8000	15000	26000	
Non-Linearity (% FSO)	$\pm 1$	$\pm 1$	$\pm 1$	$\pm 1$	
Transverse Sensitivity (%)	$<3$	$<3$	$<3$	$<3$	
Shock Limit (g)	5000	5000	5000	5000	

#### ELECTRICAL

Zero Acceleration Output (mV)	$<\pm 50$				
Excitation (Vdc)	2 to 10				
Input Resistance	2400-6000				
Output Resistance ( $\Omega$ )	2400-6000				
Insulation Resistance ( $\text{M}\Omega$ )	$>100$				@100Vdc
Ground Isolation	Isolated from mounting surface				

#### ENVIRONMENTAL

Thermal Zero Shift (%FSO/ $^{\circ}\text{C}$ (%FSO/ $^{\circ}\text{F}$ ))*	$\pm 0.05$ ( $\pm 0.03$ )				$0^{\circ}\text{C}$ to $+50^{\circ}\text{C}$
Thermal Sensitivity Shift (%/ $^{\circ}\text{C}$ (%/ $^{\circ}\text{F}$ ))*	$-0.20 \pm 0.05$ ( $-0.11 \pm 0.03$ )				$0^{\circ}\text{C}$ to $+50^{\circ}\text{C}$
Operating Temperature ( $^{\circ}\text{C}$ )	-40 to +90				
Storage Temperature ( $^{\circ}\text{C}$ )	-40 to +90				
Humidity	Epoxy Sealed, IP65				

#### PHYSICAL

Case Material	Anodized Aluminum				
Cable (Integral 30 Foot Cable)	4x #32 AWG PFA Insulated, Braided Shield, PU Jacket				
Weight (grams)	1.0				Cable not included
Mounting	2x #0-80 x 1/4" Socket Head Cap Screws				Torque 3 lb-in

<sup>1</sup> Output is ratiometric to excitation voltage

**Calibration supplied:** CS-FREQ-0100 NIST Traceable Amplitude Calibration from 20Hz to  $\pm 1\text{dB}$  Frequency Limit

**Optional accessories:** 101 Three Channel DC Signal Conditioner Amplifier  
140 Auto-zero Inline Amplifier

## ordering info

PART NUMBERING Model Number+Range+Cable Length+Options

52F-GGGG-CCC-ZZ

| | | Options  
| | Cable (360 is 360 inches)  
| Range (0500 is 500 g)

Optional Dash Numbers

-001 5Vdc Calibration  
-002 2Vdc Calibration

Example: 52F-2000-360

Model 52F, 2000g Full Scale Range, 360 inches cable, No Options

## 联系方式



深圳市亿为测控电子有限公司  
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com