

Model 64L Accelerometer





DC Response Accelerometer
Durable Cable, Small Package
Transverse Sensitive Axis
Reliable Performance

The Model 64L Accelerometer is based on an advanced piezoresistive MEMS sensing element which offers exceptional dynamic range and stability. This unit features a full bridge output configuration with a temperature range from 0 to +50° C. A slight amount of internal gas damping provides outstanding shock survivability and a flat amplitude/phase response up to >4kHz. The Model 64L is compliant with SAE J211 standards for anthropomorphic dummy instrumentation.



dimensions

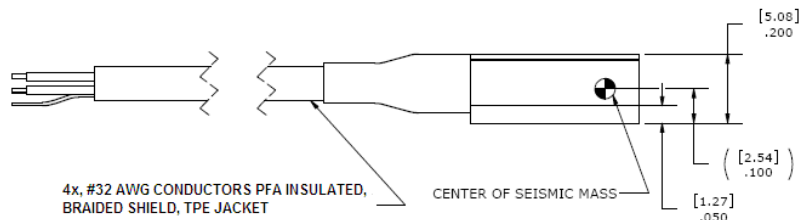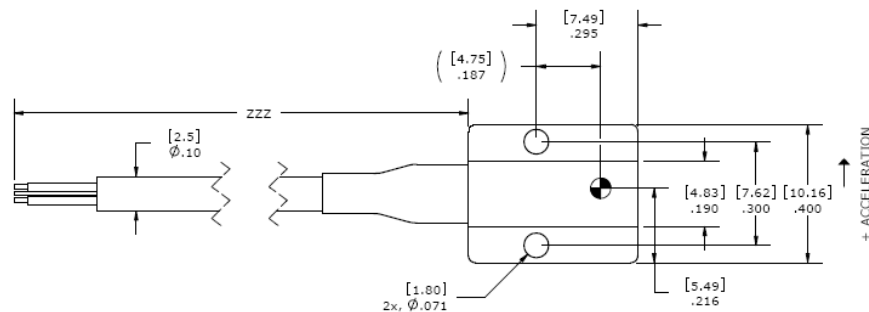


FEATURES

- 3rd GEN MEMS Sensing Element
- ± 50 to $\pm 6,000$ g Ranges
- 2-10 Vdc Excitation Voltage
- 0-50 °C Temperature Range
- High Impact Jacketed Cable
- 1% Transverse Sensitivity Option
- $< \pm 25$ mV Zero Offset

APPLICATIONS

- Safety Crash Testing
 - Auto
 - Truck
 - Recreational Vehicles
- Shock Testing

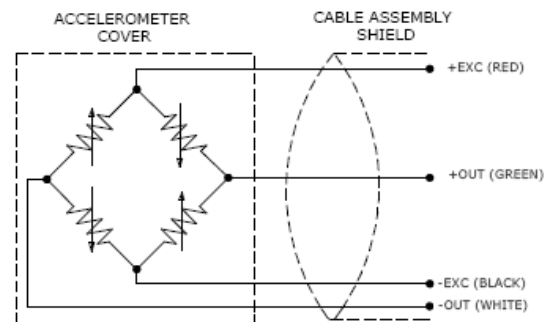

Model 64L Accelerometer

performance specifications

All values are typical at $\pm 24^{\circ}\text{C}$, 100 Hz and 10 Vdc excitation unless otherwise stated. Measurement Specialties reserves the right to update and change these specifications without notice. Standard product parameters are described in PSC-1004 for Plug & Play DC Accelerometers.

Parameters

DYNAMIC

	± 50	± 100	± 200	± 500	± 2000	± 6000	Notes
Range(g)	± 50	± 100	± 200	± 500	± 2000	± 6000	
Sensitivity (mV/g) ¹	2	0.9	0.8	0.4	0.15	0.10	
Frequency Response (Hz)	0-400	0-500	0-500	0-600	0-2000	0-2000	$\pm 2\%$
	0-1000	0-1200	0-1200	0-1400	0-3500	0-3500	$\pm 1/2\text{dB}$
	0-1400	0-1500	0-1500	0-2000	0-4500	0-4500	$\pm 1\text{dB}$
Resonant Frequency (Hz)	4000	6000	8000	15000	26000	26000	
Damping Ratio	0.5	0.5	0.5	0.3	0.05	0.05	Typical
Shock Limit (g)	10000	10000	10000	10000	10000	10000	
Non-Linearity (% of reading)	± 1	± 1	± 1	± 1	± 1	± 1	
Transverse Sensitivity (%)	<3	<3	<3	<3	<3	<3	<1% Option

ELECTRICAL

Zero Acceleration Output (mV)	< ± 25						< $\pm 10\text{mV}$ Option
Excitation (Vdc)	2 to 10						
Input Resistance (Ω)	2400-6000						
Output Resistance (Ω)	2400-6000						
Insulation Resistance (M Ω)	>100						@100Vdc
Residual Noise (μV RMS)	<10						
Ground Isolation	Isolated from mounting surface						

ENVIRONMENTAL

Thermal Zero Shift (%FSO/ $^{\circ}\text{C}$)	± 0.04						From 0 to $+50^{\circ}\text{C}$
Thermal Sensitivity Shift (%/ $^{\circ}\text{C}$)	± 0.1						From 0 to $+50^{\circ}\text{C}$
Operating Temperature ($^{\circ}\text{C}$)	-40 to +121						
Storage Temperature ($^{\circ}\text{C}$)	-40 to +121						
Humidity	Epoxy Sealed, IP61						

PHYSICAL

Case & Cover Material	Anodized Aluminum						
Cable (Integral 30 Foot Cable)	4x #32 AWG Conductors PFA Insulated, Braided Shield, TPE Jacket						
Weight (grams)	1.0						Cable Not Included
Mounting	2x #0-80 x 3/16" Socket Head Cap Screws						Torque 3 lb-in

¹ Output is ratiometric to excitation voltage

Calibration supplied: CS-FREQ-0100 NIST Traceable Amplitude Calibration from 20Hz to $\pm 1\text{dB}$ Frequency Limit

Supplied accessories: AC-A02053 2x #0-80 (3/16 length) Socket Head Cap Screw, 2x #0 Washer, 1x Allen Key

Optional accessories: 101 Three Channel DC Signal Conditioner Amplifier
140 Auto-Zero Inline Amplifier

ordering info

PART NUMBERING Model Number+Range+Cable Length+Options

64L-GGGG-CCCT-ZZZ

| | | | Options
| | | 1% Transverse Sensitivity when "T" is present
| | Cable (360 is 360 inches)
| Range (0100 is 100 g)

Optional Dash Numbers

-001 5Vdc Calibration
-002 2Vdc Calibration

Example: 64L-2000-360

Model 64L, 2000g, 360" (30ft) Cable, No Options.

联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com