

34205A Accelerometer



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

± 5 g to ± 50 g
Superior Zero g Bias Stability
Low Noise – Wide Bandwidth



Triaxial Analog Accelerometers


The Measurement Specialties 34205A triaxial accelerometer offers precision measurements over the entire -40 to $+85^{\circ}\text{C}$ temperature range with superior bias stability and measurement resolution.

A tough, compact housing holds potted electronics and the small size and built-in power regulation allow the 34205A to fit where other accelerometers can't. Choose from range options of ± 50 , ± 40 , ± 30 , ± 25 , ± 20 , ± 10 , or ± 5 , and various bandwidth options to best suit your application.


The voltage output of the 34205A is directly proportional to the acceleration along the axis. Each DC-coupled output is fully scaled, referenced, and temperature compensated. Users are supplied with a calibration certificate listing sensitivity and offset for each sensor.

The accelerometers have a nominal full scale output swing of ± 2.25 volts. The zero g output level is nominally $+2.5$ volts. Custom versions of the 34205A can be provided.

dimensions

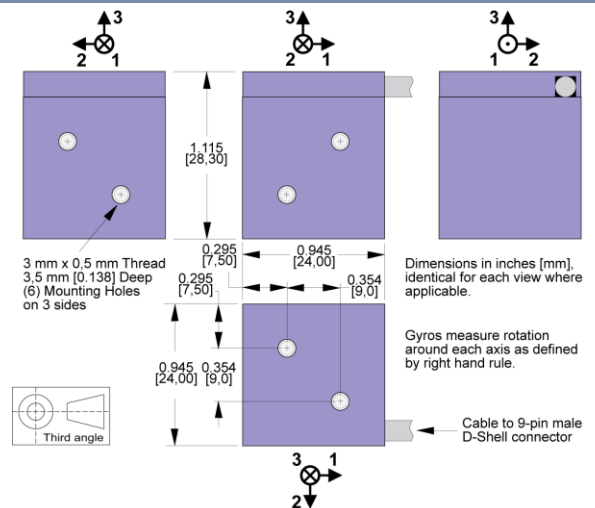


Two 3 mm x 0.5 mm threaded holes are provided on each of three orthogonal faces for mounting



Shown with mounting adapter 34170B (sold separately)

connections

T004
Male D-Shell
Connector



| Pin | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|--------|-------|---------|--------|----------|-------|------|--------|------|-------|
| Signal | A1+ | Signal- | A2+ | +5 V Out | A3+ | T+ | NC. | +Vs | Gnd |
| Wire | Brown | Red | Orange | Yellow | Green | Blue | Violet | Grey | White |

FEATURES

- Superior Zero g Bias Stability
- Low Noise
- Bandwidth to 2 kHz
- High Accuracy and Linearity over Wide Temperature Range
- Rugged for Harsh Environments
- NIST Traceable Calibration
- Built-in Power Supply Regulation
- Easy Installation
- Three Year Warranty

APPLICATIONS

- Vehicle Dynamics
- Construction Equipment
- Research & Development
- Test & Measurement
- Military/Aerospace



Performance Specifications

$T_A = T_{min}$ to T_{max} ; $8 \leq V_S \leq 18$ V; Acceleration = 0 g unless otherwise noted; within one year of calibration. Improved specifications available upon request.

| PARAMETERS | Min | Typical | Max | Units | Conditions/Notes |
|---|-------|---------|-------|---------|---|
| Range: Measurement Full Scale | ±5 | | ±50 | g | On each axis. Must specify via Option Rnnn |
| Sensitivity | | | | | |
| At 25°C, Option R050 | | 40* | | mV/g | Nom ±50 g; Precise values on cal certificate |
| Drift T_{min} to T_{max} | | | ±2.0 | % | Percent of sensitivity at 25°C |
| Zero g Bias Level | | | | | |
| At 25 °C | | 2.5 | | V | Precise values on cal certificate |
| Drift to T_{min} or T_{max} | | | | | |
| Option R050, R040, R030, R025, R020 | | ±80 | ±200 | mg | At 1.25°C/min. temperature rate of change |
| Option R010, R005 | | ±16 | ±40 | mg | At 1.25°C/min. temperature rate of change |
| Alignment | | | | | |
| Deviation from Ideal Axes | | ±0.35 | ±3.0 | degrees | Can be compensated if required |
| Nonlinearity | | | | | |
| | | ±0.15 | ±0.5 | % FSR | Best fit straight line |
| Frequency Response | 0 | | 2000 | Hz | Upper cutoff per Option Bnnn, -3 dB pt ±10% |
| Noise Density | | | | | |
| Option R050, R040, R030, R025, R020 | | 50 | | µg/√Hz | $T_A = 25^\circ\text{C}$ |
| Option R010, R005 | | 10 | | µg/√Hz | |
| Temperature Sensor | | | | | |
| | | | | | Accuracy ±1 °C |
| Sensitivity | | 6.45 | | mV/°C | |
| 0°C Bias Level | | 509 | | mV | |
| Outputs | | | | | |
| Output Voltage Swing | 0.25 | | 4.75 | V | $I_{OUT} = \pm 0.5$ mA |
| Capacitive Drive Capability | 500 | | | pF | |
| Power Supply (V_S) | | | | | |
| Input Voltage Operating | +8 | | +18 | V | Will withstand -20 V continuous or 36 V for <1 sec. |
| Input Current | | 33 | 50 | mA | No load; quiescent |
| Rejection Ratio | | >120 | | dB | DC |
| Temperature Range (T_A) | -40 | | +85 | °C | |
| Mass | | 35 | | grams | Precise values on cal certificate |
| Shock Survival | -5000 | | +5000 | g | Any axis for 0.1 ms, powered or unpowered |

*Scale linearly with range option Rnnn; see Ordering Information

ordering info

