

U5100 High Accuracy Pressure Sensor



- EMI Protected per CE Compliance
- Wide Temperature Range
- High Accuracy
- CE Compliance

DESCRIPTION

The U5100 series pressure transducers from the UltraStable™ line of MEAS, set a new price performance standard for demanding commercial and heavy industrial applications where high accuracy is required. This series is suitable for measurement of liquid or gas pressure, even for difficult media such as contaminated water, steam, and mildly corrosive fluids.

The U5100 uses MEAS' UltraStable™ technology that provides stability over a wide temperature range, performance previously available only in much higher priced sensors. The UltraStable™ technology employs a silicon-based strain gage isolated by an oil-filled capsule and a stainless steel diaphragm. The high stability rating is provided through MEMS-based technology and obtains excellent repeatability and minimal hysteresis. The U5100 exceeds the latest heavy industrial CE requirements including surge protection, and is over voltage protected in both positive and reverse polarity. The 100% 316L media isolation covers all but the most corrosive environments. Custom OEM designs available including exotic metals and various ports and output options. The durability is excellent. The U5100 exceeds the latest heavy industrial CE requirements including surge protection, and is over voltage protected to 16Vdc in both positive and reverse polarity.

This product is geared to the OEM customer who uses medium to high volumes. The standard version is suitable for many applications, but the dedicated design team at our Transducer Engineering Center stands ready to provide a semi-custom design where the volume and application warrants.

FEATURES

- Heavy Industrial CE Approval
- 100 V/m EMI Protection
- 0.75% Total Error Band
- Compact Outline
- -40°C to +125°C Operating Temperature Range

APPLICATIONS

- Advanced HVAC Controllers
- Refrigeration Systems
- Automotive Test Stands
- Industrial Process Control
- Pumps and Compressors
- Hydraulic/Pneumatic Systems
- Agriculture Equipment
- Energy and Water Management

U5100 High Accuracy Pressure Sensor

STANDARD RANGES

Range	psig	psia	Range	Barg	Bara
*0 to 1	•	•	*0 to 0.07	•	•
0 to 5	•	•	0 to 0.35	•	•
0 to 15	•	•	0 to 1	•	•
0 to 30	•	•	0 to 2	•	•
0 to 50	•	•	0 to 3.5	•	•
0 to 100	•	•	0 to 7	•	•
0 to 300	•	•	0 to 20	•	•
0 to 500	•	•	0 to 35	•	•
0 to 1k	•	•	0 to 70	•	•
0 to 1.5k	•	•	0 to 100	•	•
0 to 3k	•	•	0 to 200	•	•
0 to 5k	•	•	0 to 350	•	•

DIN Range	Barg	Bara
0 to 1	•	•
0 to 1.6	•	•
0 to 2.5	•	•
0 to 4	•	•
0 to 6	•	•
0 to 10	•	•
0 to 16	•	•
0 to 25	•	•
0 to 40	•	•
0 to 60	•	•
0 to 100	•	•
0 to 160	•	•
0 to 250	•	•

*Gage only for 1psi

Intermediate ranges available upon request.

U5100 High Accuracy Pressure Sensor

PERFORMANCE SPECIFICATIONS

Ambient Temperature: 25°C (unless otherwise specified)

PARAMETERS	MIN	TYP	MAX	UNITS	NOTES
Accuracy	-0.5		0.5	%F.S. BFSL	001psiG @ 25°C
(combined non linearity, hysteresis, and repeatability)	-0.25		0.25	%F.S. BFSL	005psi @ 25°C
	-0.1		0.1	%F.S. BFSL	>005psi, <01Kpsi @ 25°C
	-0.25		0.25	%F.S. BFSL	≥01Kpsi, ≤05Kpsi @ 25°C
Isolation, Body to any Lead	1			MΩ	@ 25Vdc
Pressure Cycles	1.00E+6			FS Cycles	
Proof Pressure			3X	Rated	
Burst Pressure			4X	Rated	
Long Term Stability (1 year)	-0.25		0.25	%F.S.	001psiG
	-0.1		0.1	%F.S.	≥005psi, ≤05Kpsi
Total Error Band (over compensated range)	-1.25		1.25	%F.S.	001psiG
	-1		1	%F.S.	005psi
	-0.75		0.75	%F.S.	>005psi, ≤05Kpsi
Compensated Temperature	0		50	°C	001psiG
	0		70	°C	005psi
	-20		+85	°C	≥005psi, ≤05Kpsi
Operating Temperature	-40		+125	°C	001psi
	-40		+125	°C	≥005psi, ≤05Kpsi, Cable 105°C
Storage Temperature	-40		+125	°C	Cable 105°C
Load Resistance (R _L)	R _L > 100k			Ω	Voltage Output
Bandwidth	DC to 1KHz (Typical)				
Shock (11ms)	50g, 11msec Half Sine Shock per MIL-STD-202G, Method 213B, Condition A				
Vibration (20 to 200kHz)	±20g, MIL-STD-810C, Procedure 514.2, Fig 514.2-2, Curve L				

For custom configurations, consult factory.

CE Compliance

- EN55022 Emissions Class A & B
- IEC61000-4-2 Electrostatic Discharge Immunity (6kV contact/8kV air)
- IEC61000-4-3 EM Field Immunity (30V/m)
- IEC61000-4-4 Electrical Fast Transient Immunity (1kV)
- IEC61000-4-5 Surge (1kV)
- IEC61000-4-6 Conducted Immunity (10V)
- IEC61000-4-9 Pulsed Magnetic Field Immunity (100A/m)


U5100 High Accuracy Pressure Sensor

CONNECTION/ PRESSURE REF			
1	CABLE 2 FEET ALPHA#3243,18AWG	DIM A	2.02 [51.3]
		DIM B	2.48 [63.0]
4	PACKARD CONNECTOR SUPPLY ON PIN A	DIM A	2.01 [51.1]
		DIM B	2.83 [71.9]
5	BENDIX PTIH-10-6P CONNECTOR	DIM A	2.05 [52.1]
		DIM B	2.48 [63.0]
6	HIRSCHMANN CONNECTOR DIN 43650 FORM C	DIM A	1.87 [47.5]
		DIM B	2.35 [59.7]
7	HIRSCHMANN CONNECTOR DIN 43650 FORM A	DIM A	2.08 [52.8]
		DIM B	2.55 [64.8]
9	PACKARD CONNECTOR SUPPLY ON PIN B	DIM A	2.01 [51.1]
		DIM B	2.83 [71.9]
D	M12 CONNECTOR	DIM A	1.98 [50.2]
		DIM B	2.53 [64.2]
M	CABLE 1 METER MANHATTAN#M39114,22AWG	DIM A	2.02 [51.3]
		DIM B	2.48 [63.0]
R	CABLE 10 METER MANHATTAN#M39114,22AWG	DIM A	2.02 [51.3]
		DIM B	2.48 [63.0]

PRESSURE PORT		
CODE	PORT	DIM C
2	1/4-19 BSPP	0.46 [11.56]
4	7/16-20 UNF MALE SAE J514 STRAIGHT THREAD O-RING BUNA-N 70SH -904 ID 8.92mm X W 1.83mm	0.33 [8.38]
5	1/4-18 NPT	0.50 [12.57]
F	1/4-19 BSPP FEMALE	0.70 [17.78]
P	7/16-20 UNF FEMALE SAE J514 STRAIGHT HREAD	0.36 [9.14]
Q	M10 X 1.0 mm	0.39 [10.01]
S	M12 X 1.5 mm	TBD
U	G1/4 DIN3852 FORM E GASKET DIN3869-14 NBR	0.47 [12.01]

U5100 High Accuracy Pressure Sensor

DIMENSIONS

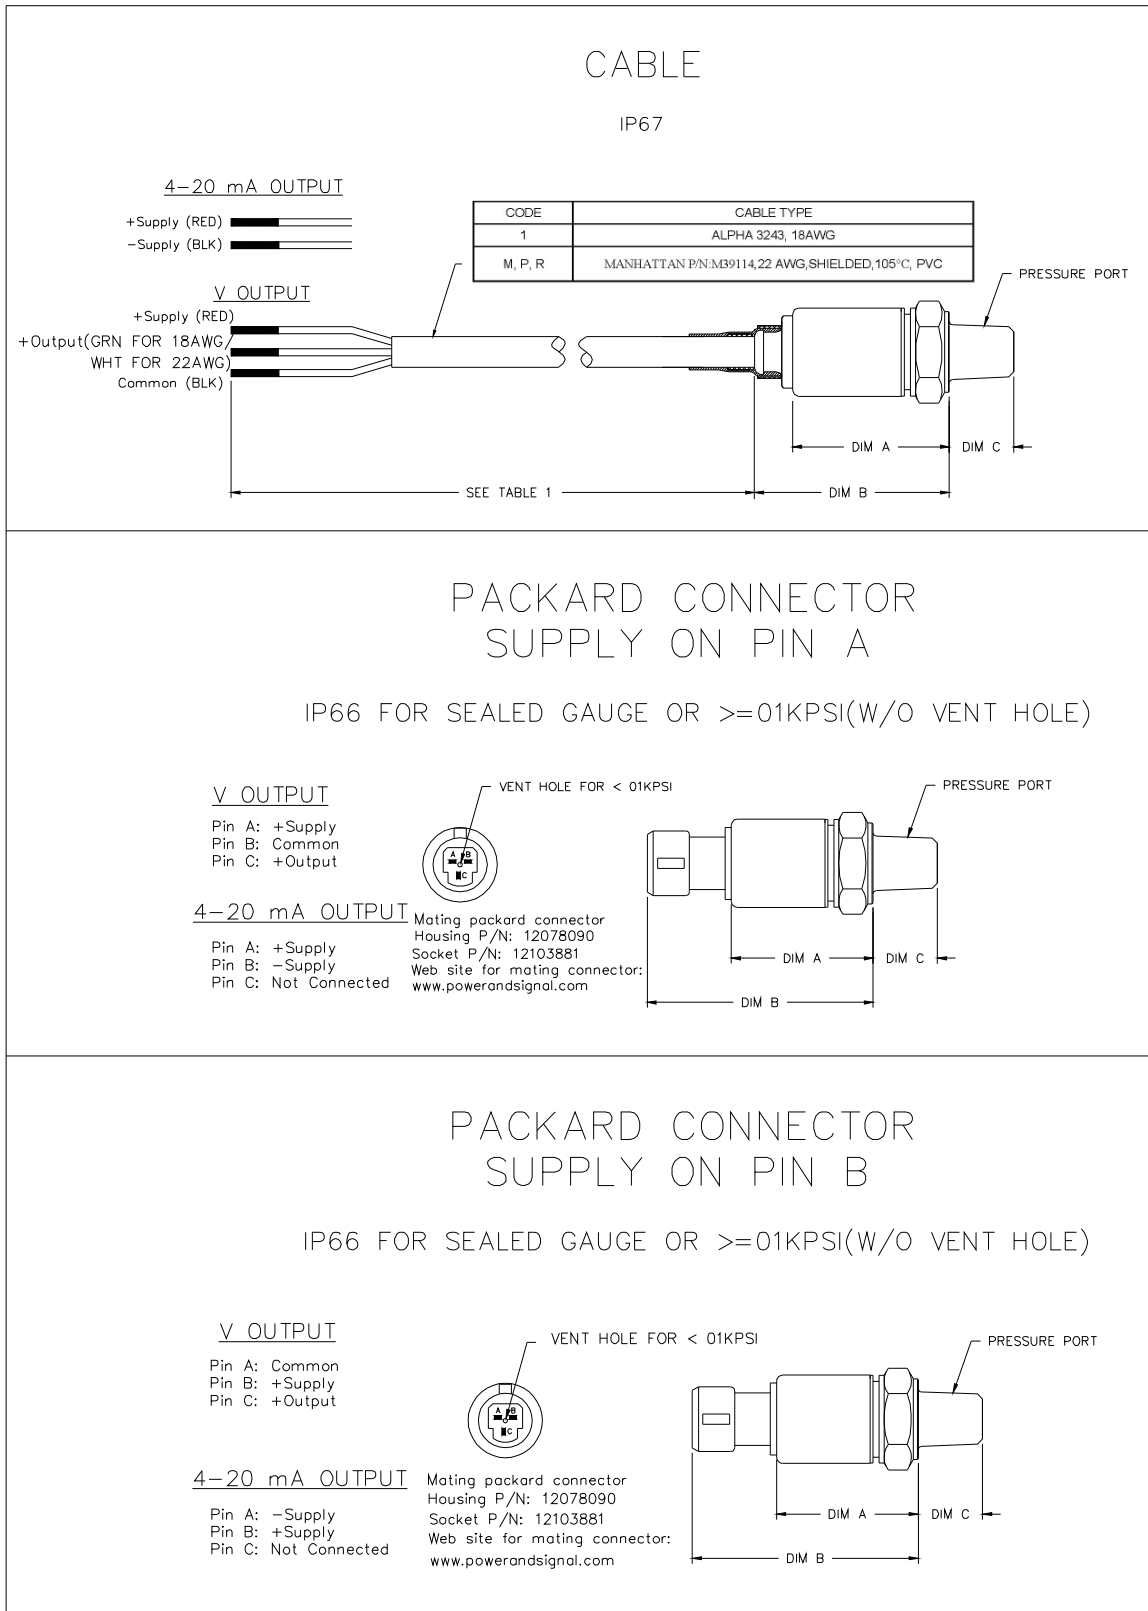

BENDIX PTIH-10-6P CONNECTOR


IP66 FOR SEALED GAUGE OR ≥ 01 KPSI(W/O VENT HOLE)

4-20 mA OUTPUT

Positive supply Pin A and B (internally connected)
 Negative supply Pin C and D (internally connected)
 Pin E: Not Connected
 Pin F: Vent (Pulled out for < 01 KPSI)

V OUTPUT

Pin A: +Supply
 Pin B: +Output
 Pin C: Common
 Pin D: Common
 Pin E: Not Connected
 Pin F: Vent (Pulled out for < 01 KPSI)

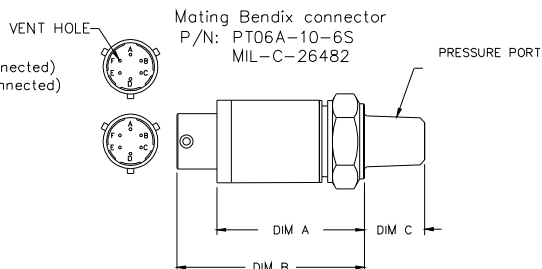

HIRSCHMANN CONNECTOR DIN 43650 FORM C

IP65 FOR SEALED GAUGE OR ≥ 01 KPSI(W/O VENT HOLE)


P/N 933-114-100

V OUTPUT

Pin 1: +Supply
 Pin 2: +Output
 Pin 3: Common
 Pin 4: Case Ground

4-20 mA OUTPUT

Pin 1: +Supply
 Pin 2: -Supply
 Pin 3: Not Connected
 Pin 4: Case Ground

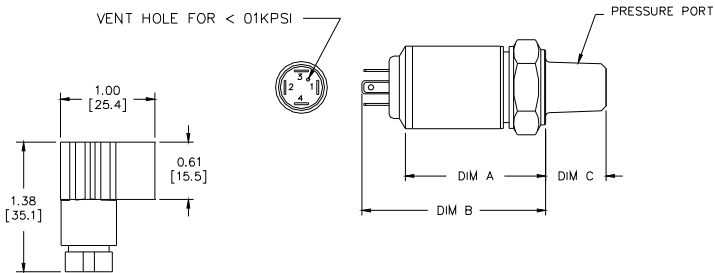

MATING CONNECTOR
 P/N: 933 024-100 (Mating Connector Supplied)

GASKET SUPPLIED WITH TRANSDUCER

HIRSCHMANN MATING
 CONNECTOR DIN 43650 FORM C

HIRSCHMANN CONNECTOR

DIN 43650 FORM A

P/N: 933 376-100


IP65 FOR SEALED GAUGE OR ≥ 01 KPSI(W/O VENT HOLE)

V OUTPUT


Pin 1: +Supply
 Pin 2: Common
 Pin 3: +Output
 Pin 4: Case Ground

4-20 mA OUTPUT

Pin 1: +Supply
 Pin 2: -Supply
 Pin 3: Not Connected
 Pin 4: Case Ground

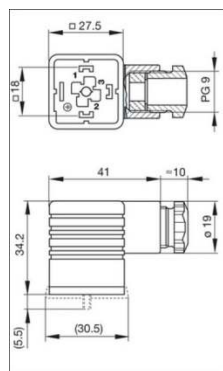

MATING CONNECTOR
 Dim Unit: MM (Mating Connector Not Supplied)
 P/N: 931 969-100
 Gasket(NBR) P/N: 730 801-002
 Knurled Screw P/N: 732 574-001
 HIRSCHMANN MATING
 CONNECTOR DIN 43650 FORM A

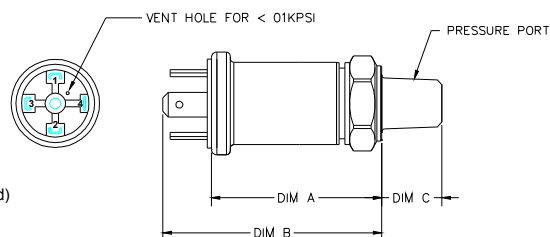

M12 CONNECTOR


IP67 FOR SEALED GAUGE OR $\geq 01\text{KPSI}$ (W/O VENT HOLE)

V OUTPUT

- Pin 1: +Supply
- Pin 2: +Output
- Pin 3: Common
- Pin 4: Not Connected

4-20 mA OUTPUT

- Pin 1: +Supply
- Pin 2: Not Connected
- Pin 3: -Supply
- Pin 4: Not Connected

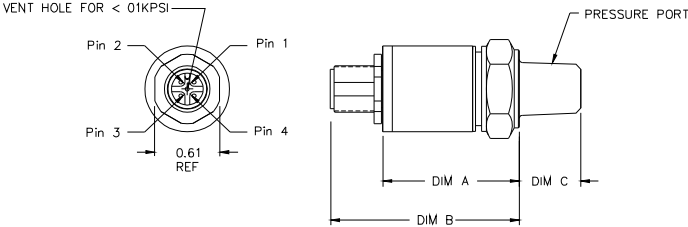


U5100 High Accuracy Pressure Sensor

OUTPUT OPTIONS

Code	Output	Supply (V)
3	0.5 – 4.5V (ratiometric)	5 ± 0.25 Ratiometric
4	1 – 5V	8 – 30
5	4 – 20mA	9 – 30
6	0 – 5V	8 – 30
7	0 – 10V	15 – 30
8	1 – 6V	8 – 30

ORDERING INFORMATION

U5131-000005-300PG

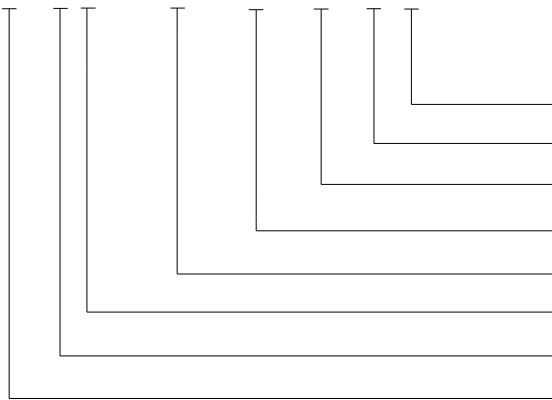

Type (G = Gage, A = Absolute, S = Sealed)
Units (P = psi, B = Bar)
Pressure Range (See Pressure Range Table)
Pressure Port (See Pressure Port Options Table)
Specials (nnnnn = Custom Drawing)
Connection (See Electrical Connection Options Table)
Output (See Output Options Table)
Model

联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000
电话：+86 755 2641 9890 传真：+86 755 2641 9680
电子邮箱：sales@bill-well.com