


FN7110 Double Range Load Cell



- Double S-Beam Load Cell
- Integrated Mechanical Stops
- 10/100 N to 1,000 /10,000 N (2/20 lbf to 200/2,000 lbf)
- High resolution
- High Accuracy
- Build in Amplifiers on request

DESCRIPTION

The **FN7110** features high accuracy measurement channels in two ranges in the same load cell. The standard ratio between the ranges is 1 to 10, and standard load range combinations go from 0-10 and 0-100 N through 0-1000 and 0-10,000 N. The **FN7110**'s percentage accuracy is the same over each range in the load cell. In practice one maintains accuracy of 0.1% over the high force range even in the first 10% of F.S.

During measurement, once the lower range sensing element reaches its designed full scale limit, mechanical stops protect it against overloads, in tension and compression, up to 12 times the full scale limit of the higher range sensing element (which is equivalent to 12 times the full scale limit of the lower range). For high-level output, a model with an integrated amplifier is available.

With many years of experience as a designer and manufacturer of sensors, Measurement Specialties, Inc. often works with customers to design or customize sensors for specific uses and testing environments. To meet your needs we also offer complete turnkey systems. The matched components (sensor, power, amplifier and digital display) are formatted, calibrated and ready for immediate use.

FEATURES

- Double Full Scale Range
- Tension and Compression - Other ranges on request
- Accuracy : 0.1% F.S.
- Integrated Mechanical Stops
- High Level Output Model with Integrated Amplifier

APPLICATIONS

- Process Control Equipment
- Robotics and Effectors
- Product Validation Testing
- Laboratory and Research

STANDARD RANGES

F.S. Ranges in N	10/100	50/500	100/1k	200/2k	500/5k	1k/10k
F.S. Ranges in lbf	2/20	10/100	20/200	40/400	100/1k	200/2k

FN7110 Double Range Load Cell

PERFORMANCE SPECIFICATIONS

All values are typical at temperature 20 ±1° C

PARAMETERS	
Operating Temperature Range [OTR]	-20 to 80° C [-4 to 176° F]
Compensated Temperature Range [CTR]	0 to 60° C [32 to 140° F]
Zero Shift in CTR	<0.5% F.S. / 50° C [/100° F]
Sensitivity Shift in CTR	<1% of reading / 50° C [/100° F]
Range [F.S.]	0-10/0-100 N to 0-1/0-10 kN [0-2/0-20 to 0-200/0-2000 lbf]
Over-Range	
Without Damage	1.2 x F.S. of the higher range
Accuracy	
Linearity	±0.1% F.S. of each range

Electrical Characteristics


Model	FN7110	FN7110-A1	FN7110-A2
Supply Voltage	10Vdc	10 to 30Vdc	±15Vdc (±12 to 18Vdc)
F.S. Output ³	±2mV/V	±2V ±5% F.S.	±5V ±5% F.S.
Zero Offset ³	<5% F.S.	2.5V ±5% F.S.	0V ±5% F.S.
Input Impedance/Consumption	150 to 200Ω	<50mA	<50mA
Output Impedance	300 to 400Ω	1 kΩ ⁴	1 kΩ ⁴
Insulation under 50Vdc	≥100MΩ	≥100MΩ	≥100MΩ

Notes

1. Cable Termination: Connector output including mate, prewired, standard length 2 m
2. Material: Body in aluminum alloy or stainless steel depending on F.S.
3. Other signal output on request
4. Output impedance < 100Ω on request
5. CE conformance according to EN 61010-1, EN 50081-1, EN 50082-1

FN7110 Double Range Load Cell

DIMENSIONS & WIRING SCHEMATIC (IN METRIC AND IMPERIAL)

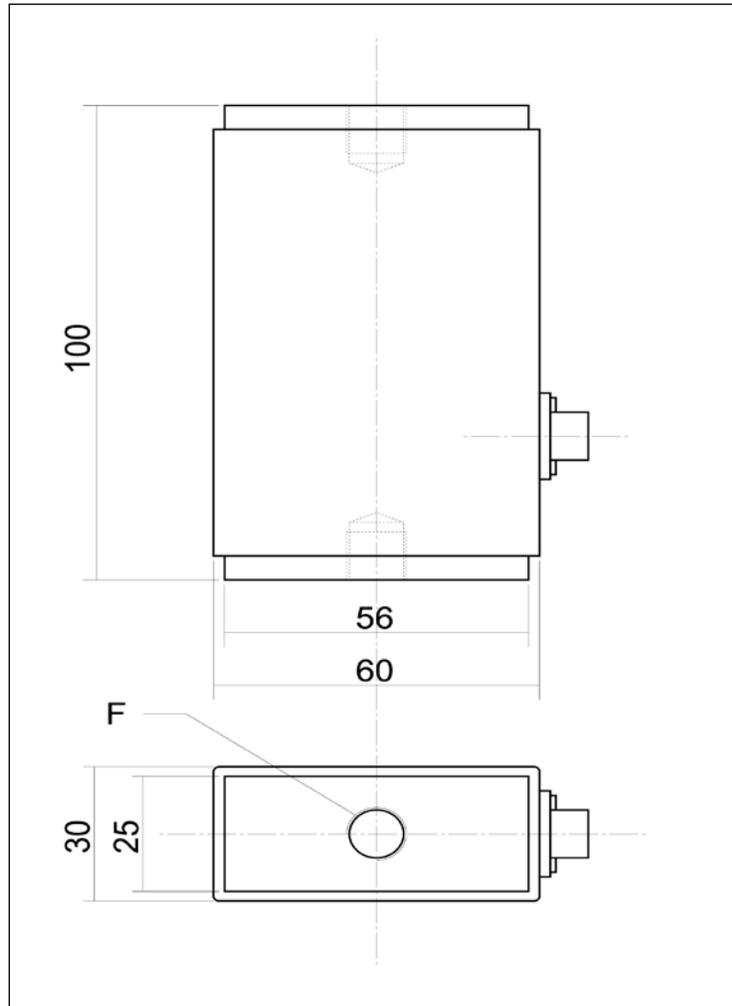

F.S. Ranges in N [in lbf]	10/100 [2/20]	50/500 [10/100]	100/1k [20-200]	200/2k [40/400]	500/5k [100/1k]	1k/10k [200/2k]
F (Thread)	M6	M10				
Material	Aluminium					Stainless Steel


FN7110 Double Range Load Cell

OPTIONS

A1 : Amplified Tension output with unipolar power supply

A2 : Amplified Tension output with bipolar power supply

ORDERING INFO

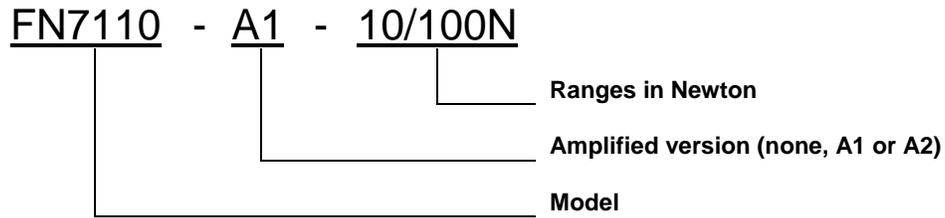

联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com