

XFTC310 Miniature Load Cell



- Range from 0-2N to 0-2KN [0.4 lbf to 400 lbf]
- Tension and/or Compression
- High Stiffness
- For Static and Dynamic Applications
- Threaded Male/Female Mechanical Fitting
- High Overload Capacity
- High Level Output Model

DESCRIPTION

The **XFTC310** series has been specifically developed to measure tension and/or compression in static and dynamic applications. The miniature size and lightweight facilitate testing where these conditions are necessary. The sensing element is fitted with a fully temperature compensated Wheatstone bridge equipped with high stability micro-machined silicon strain gages. The use of silicon strain gages optimises the load cell's performance at low ranges and frequencies. For sensors with a range of between 500 N and 2 kN [100 and 400 lbf], a high-level output model is available. With two threaded male/female studs, the **XFTC310** is easily installed in industrial or OEM applications. A strain relief spring strengthens the cable output.

With many years of experience as a designer and manufacturer of sensors, Measurement Specialties, Inc. often works with customers to design or customize sensors for specific uses and testing environments.

To meet your needs we also offer complete turnkey systems. The matched components (sensor, power, amplifier and digital display) are formatted, calibrated and ready for immediate use.

FEATURES

- Small design easy to mount
- Tension and/or Compression
- Optional IP rating improvement
- Extended temperature range available
- Other male/female threads available

APPLICATIONS

- Strain measurement on finger-like command
- Connector and cable traction tests
- Miniature press-fit device
- Robotics regulation
- Small size actuators

STANDARD RANGES

F.S. Ranges in N	2 - 5 - 10 - 20 - 50	100 to 200	500 to 1k	2k
F.S. Ranges in lbf	0.4 - 1 - 2 - 4 - 10	20 to 40	100 to 200	400
Over-range	x4	x3	x3	x2
Stiffness in N/m	3.8×10^5 to 4.7×10^7	7.9×10^7 to 2.2×10^8	3.4×10^8 to 9.6×10^8	2.7×10^9
Stiffness in lbf/ft	2.4×10^4 to 3.2×10^5	5.4×10^5 to 1.5×10^7	2.3×10^7 to 6.6×10^7	1.9×10^8
Materials	Aluminum	Stainless Steel		

XFTC310 Miniature Load Cell

PERFORMANCE SPECIFICATIONS

All values are typical at temperature 20±1° C

PARAMETERS	
Operating Temperature Range (OTR)	-40 to 120°C [-40 to 248°F]
Compensated Temperature Range (CTR)	0 to 60° C [32 to 140° F]
Zero Shift in CTR	<2% F.S. / 50° C [100° F]
Sensitivity Shift in CTR	<2% of reading / 50° C [100° F]
Range (F.S.)	0-2N to 0-2kN [0-0.4 lbf to 0-400 lbf]
Over-Range	
Without Damage	2 to 4 x F.S.
Without Destruction	3 to 6 x F.S.
Accuracy	
Linearity	≤±0.5% F.S.
Hysteresis	≤±0.5% F.S.

Electrical Characteristics



Model	XFTC310	XFTC310-A1	XFTC310-A2
Supply Voltage	10Vdc	10 – 30Vdc	±15Vdc (±12 to ±18Vdc)
F.S. Output ⁴⁵	±100mV	±2V ±5% F.S.	±5V ±5% F.S.
Zero Offset ⁴⁵	<±10mV	2.5V ±5% F.S.	0V ±5% F.S.
Input Impedance/Consumption	1000 to 3000Ω	<30mA	30mA
Output Impedance	500 to 1000Ω	1 kΩ ⁶	1 kΩ ⁶
Insulation under 50Vdc	≥100MΩ	≥100MΩ	≥100MΩ

Notes

1. Shielded cable with 4 wires (AWG36/28), standard length 2 m [6.5 ft] with strain relief spring
2. Material: Body in stainless steel or aluminum alloy depending on F.S. ; Two male/ female threads M5 or [10-32 UNF], M10 or [3/8-24 UNF] depending on F.S. (metric thread is standard)
3. Protection Index: IP50 (other levels available on request)
4. A1 and A2 options are only available for ranges 500N, 1kN and 2 kN
5. Other signal output on request
6. Output impedance < 100Ω on request
7. CE conformance according to EN 61010-1, EN 50081-1, EN 50082-1

XFTC310 Miniature Load Cell

DIMENSIONS & WIRING SCHEMATIC (IN METRIC)

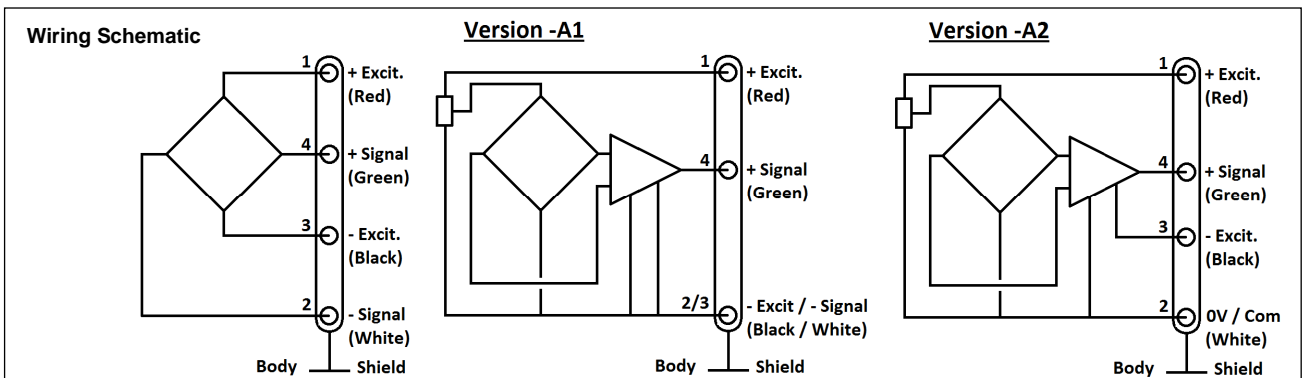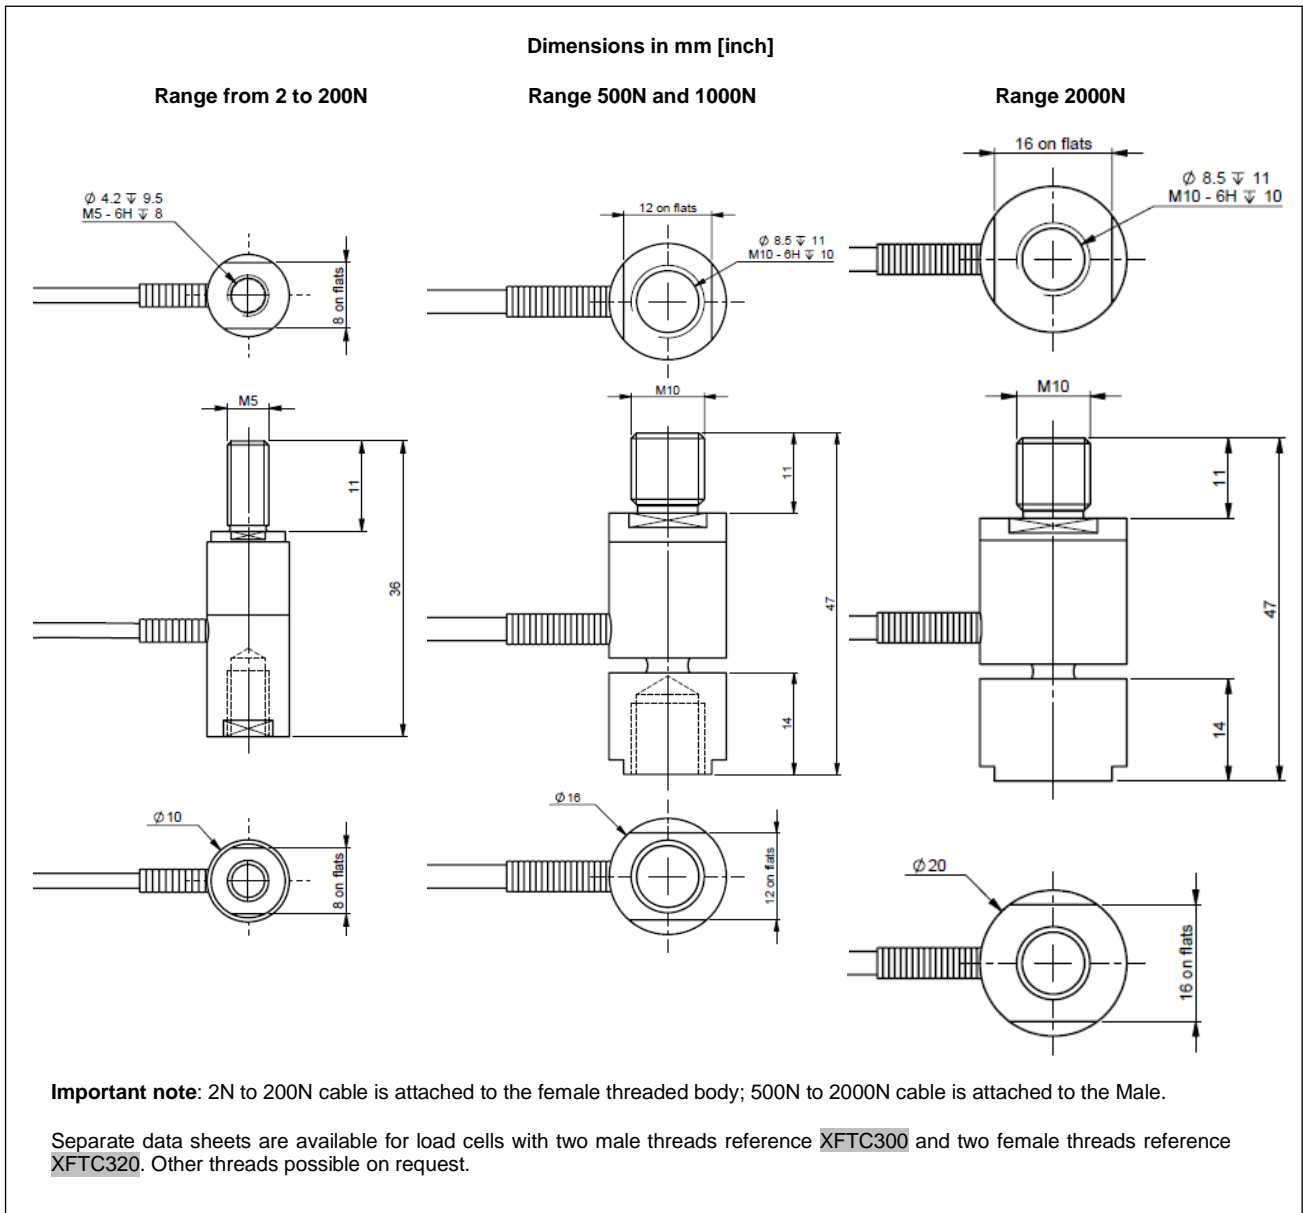


XFTC310 Miniature Load Cell

OPTIONS

A1	: Tension output with unipolar power supply (only available for ranges 500N, 1kN and 2kN)
A2	: Tension output with bipolar power supply (only available for ranges 500N, 1kN and 2kN)
ET1	: CTR -20 to 100° C [-4 to 212° F]
ET2	: CTR -40 to 120° C [-40 to 248° F]
ET3	: CTR -40 to 150° C [-40 to 302° F] OTR = CTR (option not compatible with A1 and A2 versions)
HA	: Accuracy (CNL&H) $\pm 0.5\%$ F.S. (for models $\geq 100\text{N}$; 20lbf)
TS	: Tolerance on F.S. output $\leq \pm 2\%$ F.S.
L00M	: special cable length, replace "00" with total length in meters

ORDERING INFO

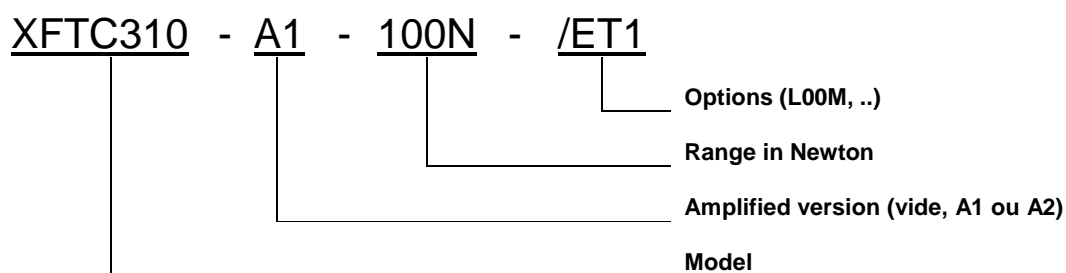

联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com