

Urea Temperature Probe with Integrated Connector



- **Robust, Compact Design**
- **Improved Overall Reliability**
- **Resistant to Urea**
- **Integrated Connector**

DESCRIPTION

This assembly consists of a NTC thermistor welded to gold plated brass pins. The sensor is over-molded together using GF30% Nylon to give a high degree of protection against water/moisture ingress. The molded unit has an integrated Molex style connector and o-ring to provide a water tight seal during assembly.

This Urea Temperature Probe with integrated connector is used to measure the temperature of the urea liquid used in Selective Catalytic Reduction (SCR) systems. This is an integral part of NOx emission control and compliance strategy with SCR systems. This exhaust after-treatment method is used with diesel engines to reduce NOx emissions. The SCR system relies on the injection of an aqueous urea solution into the exhaust stream in order to facilitate the reduction of NOx emissions. This sensor is also suitable for other immersion applications.

FEATURES

- Suitable for measuring the temperature of urea liquid used in the Selective Catalytic Reduction (SCR) systems
- Standard style connector
- Custom tolerances available upon request
- Available in a range of R/T curves
- Operating temperature range: -20°C to +125°C
- Capable of withstanding high pressures

APPLICATIONS


- Temperature measurement of urea liquid used in the Selective Catalytic Reduction (SCR) systems
- Closed loop pressurized systems
- Water tank applications

Urea Temperature Probe with Integrated Connector

PERFORMANCE SPECIFICATIONS

Parameters	Units	Value
Nominal Resistance at +25°C	Ohms	10000
Tolerance from +25°C to +85°C	°C	±1
Beta Value 25/85	K	3976
Tolerance on Beta Value	%	±1
Time response in still water (T63%)	Seconds	<40

DIMENSIONS

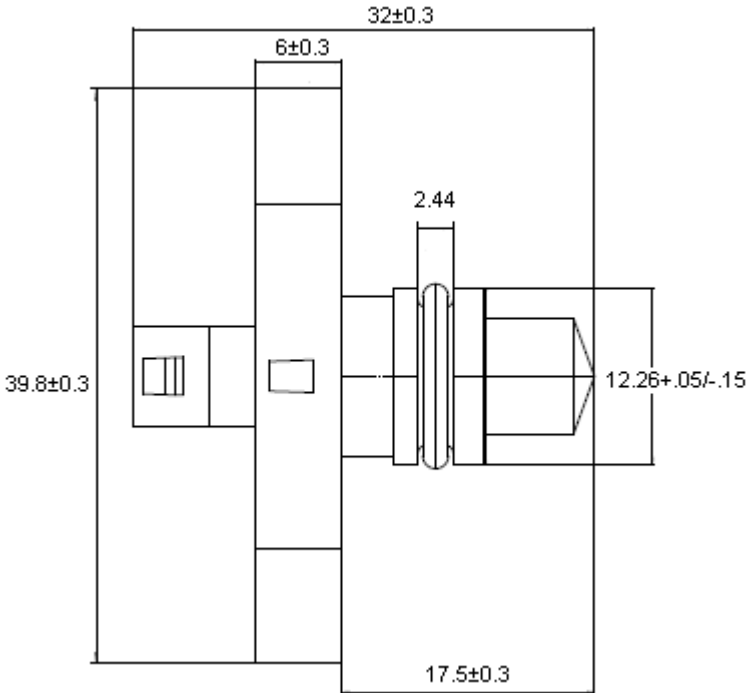

Urea Temperature Probe with Integrated Connector

RESISTANCE V TEMPERATURE TABLE

Temp. °C	Ohms
-40	336098
-39	314553
-38	294524
-37	275897
-36	258563
-35	242427
-34	227398
-33	213394
-32	200339
-31	188163
-30	176803
-29	166198
-28	156294
-27	147042
-26	138393
-25	130306
-24	122741
-23	115661
-22	109032
-21	102824
-20	97006
-19	91553
-18	86439
-17	81641
-16	77138
-15	72911
-14	68940
-13	65209
-12	61703
-11	58405
-10	55304
-9	52385
-8	49638
-7	47050
-6	44613
-5	42317
-4	40151
-3	38110
-2	36184
-1	34366
0	32651
1	31031

Temp. °C	Ohms
2	29500
3	28054
4	26687
5	25395
6	24172
7	23016
8	21921
9	20885
10	19903
11	18973
12	18092
13	17257
14	16465
15	15714
16	15001
17	14324
18	13682
19	13073
20	12493
21	11943
22	11420
23	10923
24	10450
25	10000
26	9572
27	9165
28	8777
29	8408
30	8056
31	7721
32	7402
33	7097
34	6807
35	6530
36	6266
37	6014
38	5774
39	5544
40	5325
41	5116
42	4916
43	4724

Temp. °C	Ohms
44	4542
45	4367
46	4200
47	4040
48	3887
49	3741
50	3601
51	3467
52	3339
53	3216
54	3098
55	2985
56	2877
57	2773
58	2674
59	2579
60	2487
61	2399
62	2315
63	2234
64	2157
65	2082
66	2011
67	1942
68	1876
69	1813
70	1752
71	1693
72	1637
73	1582
74	1530
75	1480
76	1432
77	1385
78	1341
79	1298
80	1256
81	1216
82	1178
83	1141
84	1105
85	1070

Temp. °C	Ohms
86	1037
87	1005
88	974
89	945
90	916
91	888
92	862
93	836
94	811
95	787
96	764
97	741
98	720
99	699
100	678
101	659
102	640
103	622
104	604
105	587
106	571
107	555
108	539
109	524
110	510
111	496
112	482
113	469
114	457
115	444
116	432
117	421
118	410
119	399
120	388
121	378
122	368
123	359
124	350
125	341

Urea Temperature Probe with Integrated Connector

ORDERING INFORMATION

Part Number	Description	Ω @25°C	MOQ
10K3D1215	Urea Temperature Probe with Integrated Connector	10000	10000*

* For quantities less than Minimum Order Quantity – contact distribution

联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com