

Model 402AC General Purpose Probe



- FDA Registered
- CE Marked for global sales
- 400 series nominal resistance response curve
- Withstands 100 autoclave cycles to 121°C
- Withstands 50 autoclave cycles to 134°C
- 2252.4 ohm Resistance @ 25°C (including lead wire resistance)
- Interchangeable $\pm 0.1^{\circ}\text{C}$, 25°C to 45°C per EN 12470,
- Tested to $\pm 0.1^{\circ}\text{C}$, 0°C to 70°C for laboratory use
- Pressed Disk Ceramic Sensor
- High sensitivity
- $\frac{1}{4}$ " phone plug connector
- 10 FR maximum tip diameter

DESCRIPTION

400-series autoclavable general purpose temperature probe

FEATURES

- FDA / CE MDD
- Standard 400 series resistance response
- Reuse after cleaning or autoclaving
- Gold plated $\frac{1}{4}$ " phone plug connector

APPLICATIONS


- Continuous patient monitoring
- Esophageal temperature – pediatric
- Rectal temperature measurement – pediatric
- Liquid immersion temperature measurement

PERFORMANCE SPECS

Parameter	Units	Value
Resistance @ 25°C (including lead resistance)	Ohms	2252.4
Tolerance 0°C to 70°C	°C	± 0.1
Beta Value 25/85	K	3976
Tolerance on Beta Value	%	0.4
Time response in stirred fluid	Seconds	20
Insulation Resistance (Min. of 100Mohms for 1 Sec.)	Volts	500
Liquid immersion with 15VDC applied	Ohms	> 15Meg

Model 402AC General Purpose Probe

MECHANICAL DETAILS

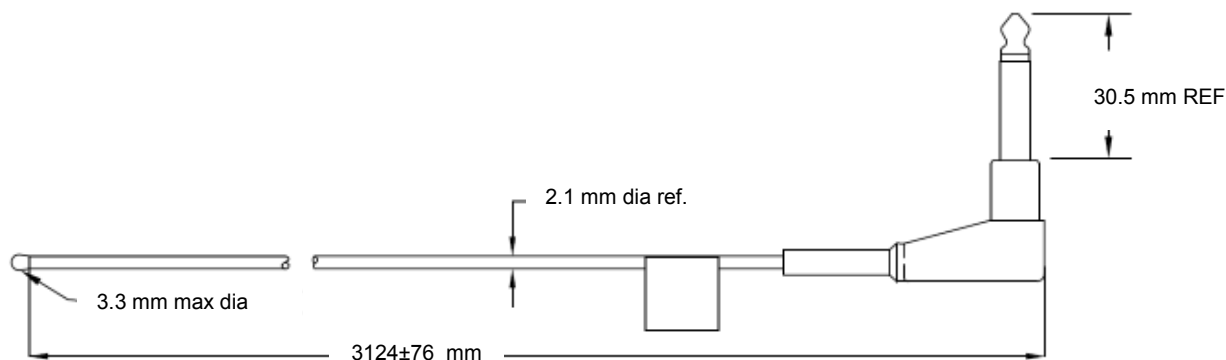

TYPICAL PERFORMANCE CURVES

Temp °C	K- Ohms
0	7.3554
1	6.9894
2	6.6444
3	6.3194
4	6.0114
5	5.7194
6	5.4444
7	5.1834
8	4.9374
9	4.7034
10	4.4824
11	4.2734
12	4.0744
13	3.8864
14	3.7084
15	3.5394
16	3.3784
17	3.2264
18	3.0814
19	2.9444
20	2.8144
21	2.6904
22	2.5724
23	2.4604
24	2.3544

Temp °C	K- Ohms
25	2.2524
26	2.1564
27	2.0644
28	1.9774
29	1.8944
30	1.8154
31	1.7394
32	1.6674
33	1.5994
34	1.5334
35	1.4714
36	1.4124
37	1.3554
38	1.3014
39	1.2494
40	1.2004
41	1.1524
42	1.1074
43	1.0644
44	1.0234
45	0.9842
46	0.9466
47	0.9106
48	0.8762
49	0.8432

Temp °C	K- Ohms
50	0.8117
51	0.7815
52	0.7526
53	0.7249
54	0.6983
55	0.6729
56	0.6485
57	0.6252
58	0.6028
59	0.5813
60	0.5607
61	0.5409
62	0.5219
63	0.5037
64	0.4862
65	0.4694
66	0.4533
67	0.4378
68	0.4229
69	0.4086
70	0.3949

Model 402AC General Purpose Probe

ORDERING INFORMATION

Part Number	Description	Ω @25°C	MOQ
008402	402AC TEMP PROBE,AUTOCLAVABLE	2252.4	\$2000

* For quantities less than Minimum Order Quantity – contact distribution

联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com

www.bill-well.com

3/3

深圳市亿为测控电子有限公司