


2 to 500K Ohms Resistance @25°C  
Hermetically Sealed Package  
High Stability at Elevated Temperatures  
Pt/Ir Lead Wires Suitable for Welding  
Rapid Time Response  
Rated up to +250 °C

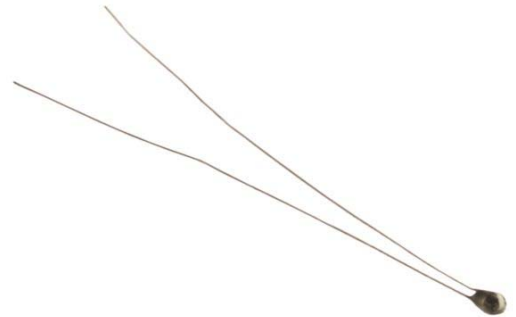

## MINIATURE RADIAL THERMISTORS

The NTC Chip is hermetically sealed in a miniature glass encapsulation package


### FEATURES

- 2 to 500K Ohms Resistance @25°C
- Proven Stability
- Glass Encapsulation
- Pt/Ir Lead wires suitable for welding
- Temperature range -40°C to +250°C
- RoHS Compliant

### APPLICATIONS

- Air-flow detection systems
- Blood analysis
- Liquid level sensing
- Platen temperature sensing
- Medical Catheter devices
- Air conditioning units
- Fluid flow sensing

## Dimensions

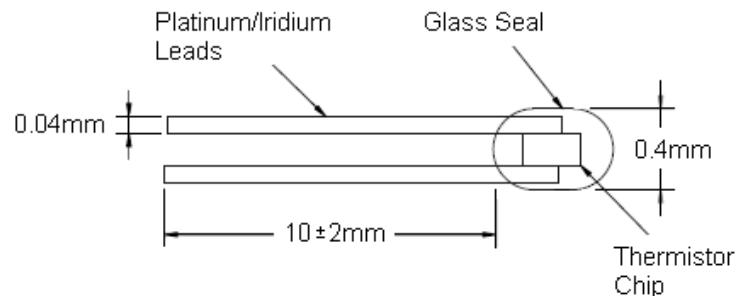

# Miniature Radial Glass NTC Thermistors

## Product Definition

Part Number	Resistance [ $\Omega$ ] @ +25°C	Tolerance @ +25°C	Beta Value 25/85	Dissipation Constant (Still Air @ +25 °C)	T.C. Constant (Still Air @ +25 °C)	Operating Temperature
<a href="#">GR2KM3187J15</a>	2,000	± 20%	3187	0.15 mW/ °C	1 second	-40° to +250°C
<a href="#">GR5KM3348J15</a>	5,000	± 20%	3348	0.15 mW/ °C	1 second	-40° to +250°C
<a href="#">GR10KM3499J15</a>	10,000	± 20%	3499	0.15 mW/ °C	1 second	-40° to +250°C
<a href="#">GR100KM3499J15</a>	100,000	± 20%	3499	0.15 mW/ °C	1 second	-40° to +250°C
<a href="#">GR150KM3976J15</a>	150,000	± 20%	3976	0.15 mW/ °C	1 second	-40° to +250°C
<a href="#">GR500KM4261J15</a>	500,000	± 20%	4261	0.15 mW/ °C	1 second	-40° to +250°C

## 联系方式



深圳市亿为测控电子有限公司  
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com