

2 to 500K Ohms Resistance @25°C  
 Hermetically Sealed Package  
 High Temperature Stability  
 Available in ±1%, ±2%, ±3% or ±5%  
 Tolerance @25°C  
 Rated up to +250 °C  
 Low Cost



## RADIAL GLASS THERMISTORS

The NTC Chip is hermetically sealed in a glass encapsulation package


## FEATURES

- 2 to 500K Ohms Resistance @25°C
- Proven Stability
- Glass Encapsulation
- Low cost
- Temperature range -40°C to +250°C
- RoHS Compliant

## APPLICATIONS

- Air conditioning systems
- Refrigeration control
- Assembly into probes for a wide variety of applications
- In environments where thermal shock and humidity are present
- Hot water boiler systems
- Sensor for engine temperature control

## Dimensions

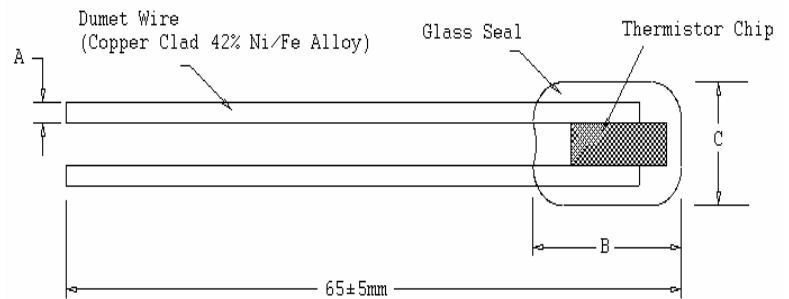

Dimensions			
	A	B	C
Series B Thermistor	0.2mm	3mm Max	1.5mm Max

# Radial Glass NTC Thermistors – Series B

## Stability

Reliability Tests	Standard	Test Condition	Delta R
Storage in Dry Heat	IEC 60068-2-2	Storage temperature: +250°C Duration: 1000 hours	< 3%
Storage in Damp Heat	IEC 60068-2-3	Temperature of air is 50°C & RH 93% Duration: 56 days.	< 2%
Rapid Temperature Cycling	IEC 60068-2-14	Lower Test Temperature -55°C Upper Test Temperature +200°C Number of Cycles 1000	< 2%

## Product Definition

Part Number	Resistance [Ω] @ +25°C	Tolerance @ +25°C	Beta Value 25/85	Beta Tolerance	Dissipation Constant in still air @ +25°C	Time response (Still Air)	Time response (Stirred Oil)
<a href="#">G2K3348B1</a>	2,000	± 1%	3348	± 2%	0.8 mW/°C	5 Seconds	0.4 Seconds
<a href="#">G2K3499B1</a>	2,000	± 1%	3499	± 2%	0.8 mW/°C	5 Seconds	0.4 Seconds
<a href="#">G5K3976B1</a>	5,000	± 1%	3976	± 2%	0.8 mW/°C	5 Seconds	0.4 Seconds
<a href="#">G10K3435B1</a>	10,000	± 1%	3435	± 2%	0.8 mW/°C	5 Seconds	0.4 Seconds
<a href="#">G10K3694B1</a>	10,000	± 1%	3694	± 2%	0.8 mW/°C	5 Seconds	0.4 Seconds
<a href="#">G10K3976B1</a>	10,000	± 1%	3976	± 2%	0.8 mW/°C	5 Seconds	0.4 Seconds
<a href="#">G30K3942B1</a>	30,000	± 1%	3942	± 2%	0.8 mW/°C	5 Seconds	0.4 Seconds
<a href="#">G50K3976B1</a>	50,000	± 1%	3976	± 2%	0.8 mW/°C	5 Seconds	0.4 Seconds
<a href="#">G100K4000B1</a>	100,000	± 1%	4000	± 2%	0.8 mW/°C	5 Seconds	0.4 Seconds
<a href="#">G200K4261B1</a>	200,000	± 1%	4261	± 3%	0.8 mW/°C	5 Seconds	0.4 Seconds
<a href="#">G500K4261B1</a>	500,000	± 1%	4261	± 3%	0.8 mW/°C	5 Seconds	0.4 Seconds

## 联系方式



深圳市亿为测控电子有限公司  
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com