

0.1 to 1K Ohms Resistance @25°C
Thermally Conductive Epoxy Coating
32 AWG Alloy 180 Leads

SERIES V THERMISTORS

The BetaCURVE chip is soldered to 32 AWG Alloy 180 leads and encapsulated in Stycast epoxy resin

FEATURES


- 0.1 to 1K Ohms Resistance @25°C
- Proven Stability and Reliability
- 32 AWG alloy 180 leads
- Thermally conductive epoxy coating
- Temperature range -40°C to +100°C
- RoHS Compliant

APPLICATIONS

- Assembly into probes used in low temperature applications
- Suitable for measurement applications at the lower temperature ranges
- Temperature sensing, control and compensation



Dimensions

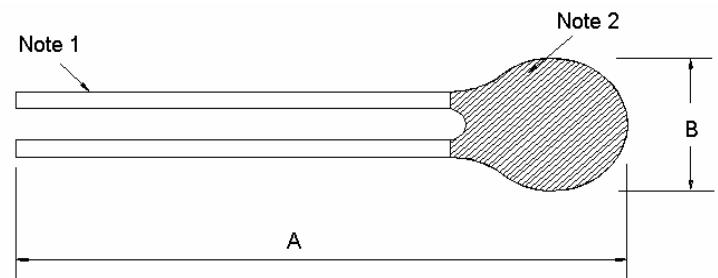

	Dimensions	
	A	B
	76 ± 3mm	2.4mm Max
Note 1	32 AWG Alloy 180 Leads	
Note 2	Black Stycast 2850ft Epoxy	

Series V Thermistors

Part Number	Color Coding	Resistance [Ω] @ +25°C	Tolerance from 0 to +25°C	Alpha Value @ +25°C	Beta Value 25/85	Dissipation Constant in still air @ +25°C	Time response (Stirred Oil)
0.1K1A337	Black	100	±1.5°C	-3.50 %/ °C	3187	0.75 mW/°C	<1 second
0.1K1A339	Black	100	±3.0°C	-3.50 %/ °C	3187	0.75 mW/°C	<1 second
0.3K1A341	Black	300	±1.5°C	-3.50 %/ °C	3187	0.75 mW/°C	<1 second
1K2A1	Black	1,000	±0.2°C	-3.68 %/ °C	3348	0.75 mW/°C	<1 second
1K7A1	Black	1,000	±0.2°C	-3.87 %/ °C	3499	0.75 mW/°C	<1 second

联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com