

2.2 to 100K Ohms Resistance @25°C
 Thermally Conductive Epoxy Coating
 Available in Custom Tolerances
 30 AWG Solid Tin Plated Copper
 Leads



SERIES III THERMISTORS

The BetaCURVE chip is soldered to 30 AWG tin plated copper leads and encapsulated in Stycast epoxy resin.


FEATURES

- 2.2 to 100K Ohms Resistance @25°C
- Proven Stability and Reliability
- 30AWG Solid Tin Plated Copper Leads
- Thermally Conductive Epoxy Coating
- Temperature Range -40°C to +125°C
- RoHS Compliant

APPLICATIONS

- Tight tolerance instrumentation
- Temperature sensing, control and compensation
- Assembly into probes for a wide variety of applications
- General instrumentation applications

Dimensions

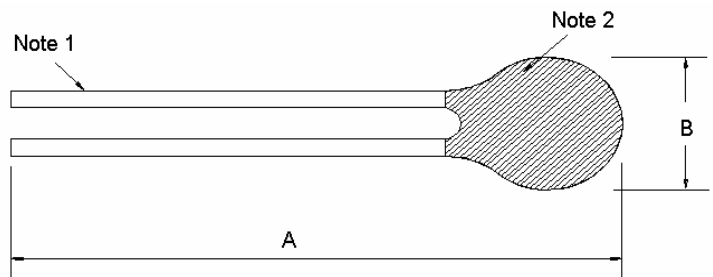

Dimensions		
	A	B
	46 ± 5mm	2.4mm Max
Note 1	30 AWG Solid Tin Plated Copper Leads	
Note 2	Stycast 2850ft Epoxy	

Series III Thermistors

Part Number	Color Coding	Resistance [Ω] @ +25°C	Tolerance from 0 to +70°C	Alpha Value @ +25°C	Beta Value 25/85	Beta Tolerance	Dissipation Constant in still air @ +25°C	Time response (Stirred Oil)
2.2K3A1W2	Brown	2,252	±0.2°C	-4.39 %/ °C	3976	±0.5%	2 mW/°C	<1.3 second
3K3A1W2	Red	3,000	±0.2°C	-4.39 %/ °C	3976	±0.5%	2 mW/°C	<1.3 second
5K3A1W2	Orange	5,000	±0.2°C	-4.39 %/ °C	3976	±0.5%	2 mW/°C	<1.3 second
10K3A1W2	Yellow	10,000	±0.2°C	-4.39 %/ °C	3976	±0.5%	2 mW/°C	<1.3 second
10K4A1W2	Black	10,000	±0.2°C	-4.04 %/ °C	3694	±0.5%	2 mW/°C	<1.3 second
30K5A1W2	White	30,000	±0.2°C	-4.30 %/ °C	3942	±0.5%	2 mW/°C	<1.3 second
30K6A1W2	Green	30,000	±0.2°C	-4.68 %/ °C	4261	±0.5%	2 mW/°C	<1.3 second
50K6A1W2	Blue	50,000	±0.2°C	-4.68 %/ °C	4261	±0.5%	2 mW/°C	<1.3 second
100K6A1W2	Violet	100,000	±0.2°C	-4.68 %/ °C	4261	±0.5%	2 mW/°C	<1.3 second

联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000
电话：+86 755 2641 9890 传真：+86 755 2641 9680
电子邮箱：sales@bill-well.com