

# High Humidity Environments Probe (MRBD)

✓RoHS

2.2 to 100K Ohms Resistance @25°C  
 ±0.2°C Tolerance from 0°C to +70°C

High degree of Resistance to  
 Moisture and High Humidity  
 Environments


Fast Time Response



## Dimensions

### MRBD PROBE

NTC thermistor soldered to 32 AWG Solid Silver Plated Copper Wire with PTFE Insulation. Unit is potted in a polyimide tube with thermally conductive epoxy.

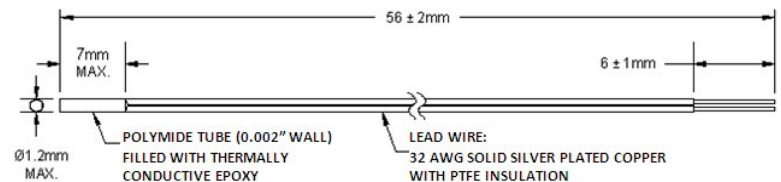

### FEATURES

- 2.2K to 100K Ohms Resistance @25°C
- Supplied with  $\pm 0.2^\circ\text{C}$  tolerance from 0 to +70°C
- High degree of resistance to moisture and high humidity environments (Standard IEC 60068-2-3)
- Custom tolerances available
- Rapid time response (400 milliseconds in liquids)
- Temperature range  $-40^\circ\text{C}$  to  $+100^\circ\text{C}$
- RoHS Compliant

### APPLICATIONS

- Small biomedical probes and catheter assemblies
- Micro-flow sensing
- Instrumentation and specialist probes
- Temperature monitoring in communication systems

# High Humidity Environments Probe (MRBD)

## Product Definition

Part Number	Resistance [ $\Omega$ ] @+25°C	Tolerance from 0°C to +70°C	Beta Value 25/85	Tolerance on Beta Value	Time response in liquids [milliseconds]	Dissipation Constant in still air [mW/°C]	Temperature Range
<a href="#">2.2K3MRBD1</a>	2,252	$\pm 0.2^\circ\text{C}$	3976	$\pm 0.5^\circ\text{C}$	400	0.5	-40°C to +100°C
<a href="#">3K3MRBD1</a>	3,000	$\pm 0.2^\circ\text{C}$	3976	$\pm 0.5^\circ\text{C}$	400	0.5	-40°C to +100°C
<a href="#">5K3MRBD1</a>	5,000	$\pm 0.2^\circ\text{C}$	3976	$\pm 0.5^\circ\text{C}$	400	0.5	-40°C to +100°C
<a href="#">10K3MRBD1</a>	10,000	$\pm 0.2^\circ\text{C}$	3976	$\pm 0.5^\circ\text{C}$	400	0.5	-40°C to +100°C
<a href="#">100K6MRBD1</a>	100,000	$\pm 0.2^\circ\text{C}$	4261	$\pm 0.5^\circ\text{C}$	400	0.5	-40°C to +100°C

## 联系方式



深圳市亿为测控电子有限公司  
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com