

Stator RTD Sensor

Variety of Configurations
 Single and Dual Elements
 SmackProof Stators

Custom Designs Available with:

- Specific Dimensions
- Side Exit
- Paddle Style
- High Accuracy
- Special Cable or Leadwires



The **Stator RTD Sensor** is a rectangular, flat, laminated sensors commonly called “Stator Sticks” because they are inserted between the coils in the stator of a motor. These averaging type sensors are used in electric motors and generators for continuous sensing of the temperature and provide for consistent thermal monitoring without false alarms. Many sizes are in stock or we can customize for your application. Measurement Specialties’ Stator RTD sensors are built to meet the specifications of ANSI C50.10-1990, general requirements for synchronous motors. We can build to your specifications!


FEATURES

- Rear Exit, Epoxy Glass Laminated
- Elements, Single and Dual:
 - » Platinum, Copper, Nickel
- Custom Body Thickness: .030” to .375”
 - » Standard: .030”, .050”, .078”, .093”, .125”
- Custom Body Widths: .250” to 2.50”
 - » Standard: .260”, .305”, .344”, .455”, .500”, .625”
- Leadwire/Cable Options

APPLICATIONS

- Electric Motors
- Generators

dimensions

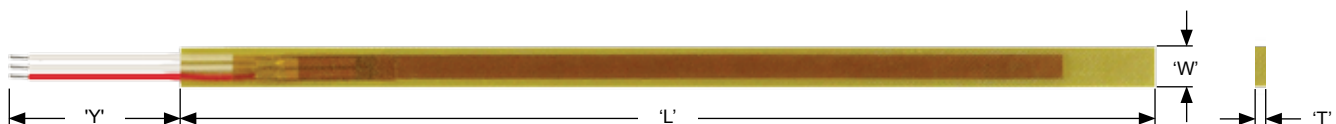

'L' = Body Length
 'W' = Body Width
 'T' = Body Thickness
 'Y' = Leadwire/Cable Length

Stator RTD Sensor

performance specifications

Dielectric Strength:

Class F: 3,000 volts RMS @ 60 Hz for 1 minute,
between leads and external body surface

Class H: 2,000 volts RMS @ 60 Hz for 1 minute,
between leads and external body surface

RTD Leadwires:

Two Wire, Three Wire or Four Wire

Standard: Stranded Copper plated wire with PTFE insulation

Other leadwire coverings available

Temperature Limits:

Class F: 155°C (311°F)

Class H: 180°C (356°F)

ordering info

Stator RTD Sensor, Rear Exit				
Model	Classification	Temperature Limit	Material	Dielectric Strength
300F	Class F	155°C	Epoxy Glass	3,000 Volts
300H	Class H	180°C	Epoxy Glass	2,000 Volts
Model	Element	Accuracy	Temperature Coefficient	
P2B	Platinum	100 Ohm \pm 1.2% at 0°C	.00385	
P2C	Platinum	100 Ohm \pm 5% at 0°C	.00385	
P2D	Platinum	100 Ohm \pm 2% at 0°C	.00385	
G2C	Platinum	100 Ohm \pm 5% at 0°C	.00392	
C1D	Copper	10 Ohm \pm 2% at 25°C	.00427	
N3C	Nickel	120 Ohm \pm 5% at 0°C	.00672	
Model	'L' Body Length			
----	Define 'L' Length in Inches (12 = 12.0")			
Model	Leadwires, Element Configuration			Color Code
2S	Two Wire, Single			Red/White
3S	Three Wire, Single			Red/White/White
4S	Four Wire, Single			Red/Red/White/White
3D	Three Wire, Dual			Red/White/White // Blue/Yellow/Yellow
Model	'T' Body Thickness	Standard Leadwires		
A	.030"	30 AWG		
B	.050"	26 AWG		
C	.078"	22 AWG		
D	.093"	22 AWG		
E	.125"	22 AWG		
F	.093"	22 AWG		
G	.125"	22 AWG		
Model	'Y' Leadwire/Cable Options			
----	Define 'Y' Length in Inches (120 = 120.0")			
Model	'W' Body Width			
A	.260" (Single Element Only)			
B	.305" (Single Element Only)			
C	.344" (Single Element Only)			
D	.455" (Single Element Only)			
E	.500"			
F	.625"			

联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com