

Twin Threaded Fitting
Variety of Configurations
Single and Dual Elements
Stainless Steel Case
Heavy Duty
Oil Resistant
Pressure Resistant

Custom Designs Available with:

- Connection Heads
- Transmitters



The **Direct Immersion Heavy Duty RTD Probe** is constructed with a heavy duty, reduced tip stainless steel sheath and a welded connection. The welded connection is typically a 1/2" x 1/2" NPT, 1/2" x 3/4" NPT or 3/4" x 3/4" NPT connection. The connection is dual threaded for use with a connection head. The sensors are available with single or dual elements. These sensors are ideal for the process industry where immersion in the application is essential.


FEATURES

- Sheath Styles:
 - » Stainless Steel
- Elements, Single and Dual:
 - » Platinum, Copper, Nickel
- Sheath Diameters:
 - » 0.375" reduced to 0.250"
 - » 0.500" reduced to 0.250"
- Leadwire/Cable Options

APPLICATIONS

- Process
- Aerospace
- Flow
- Hot Melt

dimensions

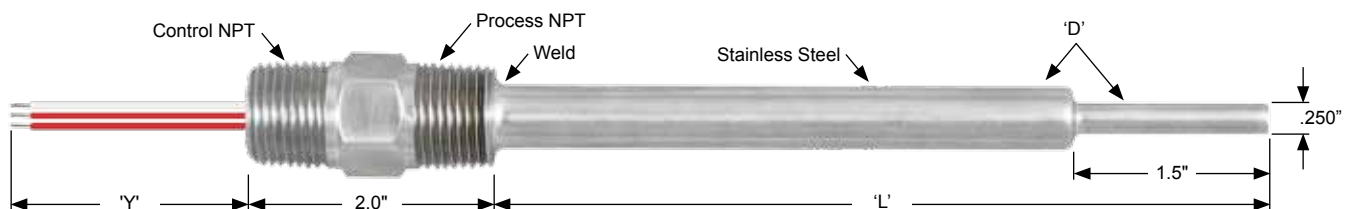

'D' = Sheath Diameter
'L' = Sheath Length
'Y' = Leadwire/Cable Length

Direct Immersion Heavy Duty RTD Probe

performance specifications

Repeatability:

Less than $\pm .06\%$ change in ice point resistance after 10 consecutive cycles between ice point and 250°C

Long Term Stability:

Less than $\pm .2\%$ ice point resistance shift after 1,000 hours at 250°C

Self Heating:

10 mW/C in water moving 3 feet/sec

Pressure Rating:

1,500 psi

Insulation Resistance:

1,000 megohms @ 500 V, leads to case

Vibration:

Withstands 5 to 500 Hz at 3 g-level peak for 3 hours. Per ASTM E 644, Sec. 10.

Shock:

Withstands 50 g-level peak sine wave shock of 11 milliseconds duration. Per ASTM E 644, Sec. 11

RTD Temperature Accuracy Specifications:

Element Material	TCR	Standard Tolerances at 0°C			
		$\pm .06\%$	$\pm .12\%$	$\pm .2\%$	$\pm .5\%$
Platinum	0.00385	0.15°C, 0.06Ω	0.30°C, 0.12Ω	0.50°C, 0.19Ω	1.20°C, 0.46Ω
Platinum	0.00392	N/A	N/A	N/A	1.20°C, 0.46Ω

ordering info

Direct Immersion Heavy Duty RTD Probe

Model	Temperature Range		
112M	Moderate: -50 to 250°C (-58 to 482°F)		
Model	Element	Accuracy	Temperature Coefficient
P2A	Platinum	100 Ohm $\pm .06\%$ at 0°C	.00385
P2B	Platinum	100 Ohm $\pm .12\%$ at 0°C	.00385
P2C	Platinum	100 Ohm $\pm .5\%$ at 0°C	.00385
P6B	Platinum	1,000 Ohm $\pm .12\%$ at 0°C	.00385
G2C	Platinum	100 Ohm $\pm .5\%$ at 0°C	.00392
Model	Leadwires, Element Configuration	Typical Color Code	
3S	Three Wire, Single	Red/Red/White	
4S	Four Wire, Single	Red/Red/White/White	
4D	Three Wire, Dual	Red/Red/White // Black/Green/Green	
Model	'L' Sheath Length		
---	Define 'L' Length in Inches (12 = 12.0") Note: Minimum 1.5" / Maximum 36.0"		
Model	'D' Sheath Diameter		
A	.375" reduced to .250" Diameter		
B	.500" reduced to .250" Diameter		
Model	Process x Control Threads		
1	1/2"NPT x 1/2"NPT (Standard)		
2	1/2"NPT x 3/4"NPT		
3	3/4"NPT x 3/4"NPT		
Model	Connection Head (Terminal Block Included)		
N	No Connection Head		
A	Stainless Steel		
B	Aluminum		
C	Polypropylene		
D	Cast Iron		
G	Small Stainless Steel		
Model	'Y' Leadwire/Cable Options		
N	No Options, Stranded TFE Leadwires (36.0" Standard)		
W	Leadwire Options		
Model	Additional Options (Leave Code Blank if Not Required)		
T	Transmitter Options		

联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编: 518000

电话: +86 755 2641 9890 传真: +86 755 2641 9680

电子邮箱: sales@bill-well.com