


Averaging RTD Probe— Process Threaded Fitting



Averages Temperature
Flexible Sheath
Process Threaded Hex Fitting
Three Sheath Styles Available

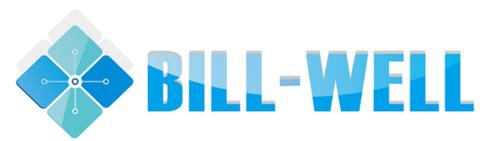

The **Averaging RTD Probe—Process Twin Threaded Fitting** is designed for use in and around intake manifolds and heating/cooling coils in HVAC systems. The flexible sheath has a sensitive area that is equal to its overall length. This provides an average temperature of the air as it moves through the system. Acquiring the average air temperature over a large area of airflow can provide more consistent temperature control throughout the system. This sensor also eliminates the need for multiple sensors and instrumentation. Mounting these sensors can easily be achieved by using either our fixed or adjustable fittings. Connection heads and conduit boxes are available for a seamless transition to instrumentation.


FEATURES

- Sheath Styles:
 - » Stainless Steel, Copper, Aluminum
- Elements, Single:
 - » Platinum
- Sheath Diameter:
 - » 0.250"
- Process Threaded Hex Fitting:
 - » 1/2" NPT
 - » Custom Threads Available
- Leadwire/Cable Options

APPLICATIONS

- HVAC

dimensions

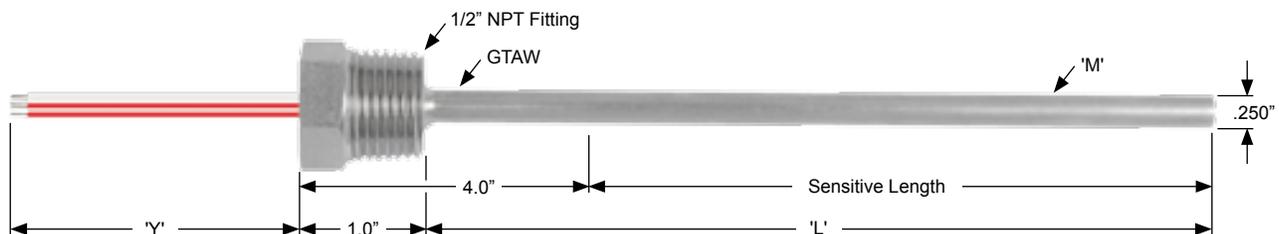

'D' = Sheath Diameter
'L' = Sheath Length
'Y' = Leadwire/Cable Length
'M' = Sheath Material

Averaging RTD Probe— Process Threaded Fitting

performance specifications

Insulation Resistance:

Single Elements: 1,000 megohms @ 500 VDC leads to case

Temperature Range:

-100 to 200°C (-148 to 382°F)

Minimum Bend Radius:

Stainless Steel: 9.0" Radius

Copper: 6.0" Radius

Aluminum: 8.0" Radius

Element Wire:

Simulated Platinum

RTD Temperature Accuracy Specifications:

Element Material	TCR	Standard Tolerances at 0°C	
		±.12%	±.5%
Platinum	0.00385	0.30°C, 0.12Ω	1.20°C, 0.46Ω

ordering info

Averaging RTD Probe—Process Threaded Hex Fitting

Model	Temperature Range		
513M	Moderate: -100 to 200°C (-148 to 382°F)		
Model	Element	Accuracy	Temperature Coefficient
P2B	Platinum	100 Ohm ±.12% at 0°C	.00385 (Model P2B Maximum Sheath Length 36.0")
P2C	Platinum	100 Ohm ±.5% at 0°C	.00385
Model	Leadwires, Element Configuration		Typical Color Code
2S	Two Wire, Single		Red/White
3S	Three Wire, Single		Red/Red/White
4S	Four Wire, Single		Red/Red/White/White
Model	'L' Sheath Length		
---	Define 'L' Length in Inches (12 = 12.0") Maximum 1,200.0"		
Model	'M' Sheath Material		
A	Stainless Steel		
B	Copper		
C	Aluminum		
Model	'Y' Leadwire/Cable Options		
N	No Options, Stranded PTFE Leadwires (36.0" Standard)		
W	Leadwire Options		
Model	Additional Options (Leave Option Model Blank if Not Required)		
R	Reverse Thread, Control Thread Hex Fitting		

联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com