

Averaging RTD Probe— Twin Threaded Fitting



- Averages Temperature
- Flexible Sheath
- Twin Threaded Hex Fitting
- Three Sheath Styles Available
- Connection Heads Available
- Transmitters Available



The **Averaging RTD Probe—Twin Threaded Fitting** is designed for use in and around intake manifolds and heating/cooling coils in HVAC systems. The flexible sheath has a sensitive area that is equal to its overall length. This provides an average temperature of the air as it moves through the system. Acquiring the average air temperature over a large area of airflow can provide more consistent temperature control throughout the system. This sensor also eliminates the need for multiple sensors and instrumentation. Mounting these sensors can easily be achieved by using either our fixed or adjustable fittings. Connection heads and conduit boxes are available for a seamless transition to instrumentation.


FEATURES

- Sheath Styles:
 - » Stainless Steel, Copper, Aluminum
- Elements, Single:
 - » Platinum
- Sheath Diameter:
 - » 0.250"
- Twin Threaded Hex Fitting
 - » 1/2" x 1/2" NPT
- Leadwire/Cable Options

APPLICATIONS

- HVAC

dimensions

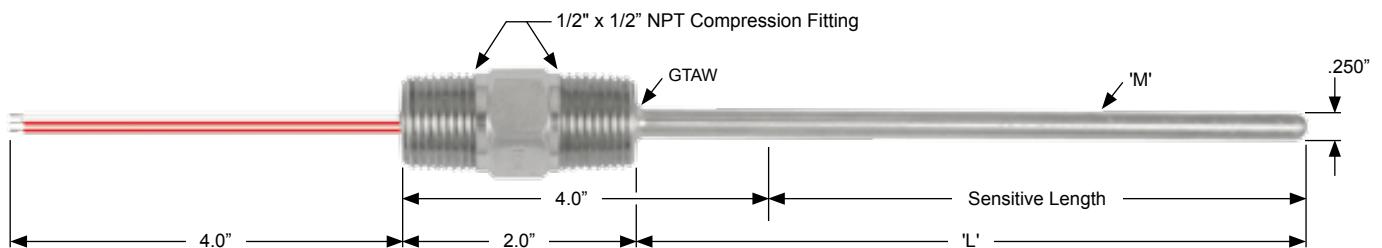

'D' = Sheath Diameter
'L' = Sheath Length
'Y' = Leadwire/Cable Length
'M' = Sheath Material

Averaging RTD Probe— Twin Threaded Fitting

performance specifications

Insulation Resistance:

Single Elements: 1,000 megohms @ 500 VDC leads to case

Temperature Range:

-100 to 200°C (-148 to 382°F)

Minimum Bend Radius:

Stainless Steel: 9.0" Radius

Copper: 6.0" Radius

Aluminum: 8.0" Radius

Element Wire:

Simulated Platinum

RTD Temperature Accuracy Specifications:

Element Material	TCR	Standard Tolerances at 0°C	
		±.12%	±.5%
Platinum	0.00385	0.30°C, 0.12Ω	1.20°C, 0.46Ω

ordering info

Averaging RTD Probe—Twin Threaded Hex Fitting

Model Temperature Range

512M Moderate: -100 to 200°C (-148 to 382°F)

Model Element Accuracy Temperature Coefficient

P2B Platinum 100 Ohm ±.12% at 0°C .00385 (Model P2B Maximum Sheath Length 36.0")

P2C Platinum 100 Ohm ±.5% at 0°C .00385

Model Leadwires, Element Configuration Typical Color Code

2S Two Wire, Single Red/White

3S Three Wire, Single Red/Red/White

4S Four Wire, Single Red/Red/White/White

Model 'L' Sheath Length

-- Define 'L' Length in Inches (12 = 12.0") Maximum 1,200.0"

Model Connection Head

N No Connection Head

A Stainless Steel

B Aluminum

C Polypropylene

D Cast Iron

G Small Stainless Steel

Model 'M' Sheath Material

A Stainless Steel

B Copper

C Aluminum

Model 'Y' Leadwire/Cable Options

N No Options, Stranded PTFE Leadwires (36.0" Standard)

W Leadwire Options

Model Additional Options (Leave Option Model Blank if Not Required)

T Transmitter Options

联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com