

Variety of Configurations
Single and Dual Junctions
Stainless Steel Case with Alloy Tip



Explosionproof Sensor Assembly—Thermocouple, Quick Release Spring Loaded Fitting with Transmitter

- Tip sensitive, spring-loaded temperature sensor assembly
- Used in electric motors and generators for continuous sensing of the temperature of the bearings
- Approved for use in explosionproof and flameproof applications
- U.S. or European threads available

FEATURES

- Sheath Styles:
 - » Stainless Steel with Copper or Aluminum Tip
- Junction Types, Single and Dual:
 - » J, K, T, E
 - » Grounded or Ungrounded
- Sheath Diameters:
 - » .188", .215", .236" (6.0 mm), .250"
- Transmitter

APPLICATIONS

- Motors
- Generators

performance specifications

Temperature Range (Process):
-50°C to 260°C

Material:
Probe: 304 or 316 Stainless Steel with Fast Response Copper or Aluminum Tip
Extension Fittings: 303 Stainless Steel
Connection Head: Epoxy Coated Aluminum or Stainless Steel
Transmitter: 94V-0 Rated Fiberglass

Pressure Rating:
50 psi (3.4 bar)


Insulation Resistance - Ungrounded Model Only:
1,000 megOhms minimum between element and case at 500 VDC
Dual Junction: 100 megOhms minimum between elements at 500 VDC t

Time Constant (typical 3 ft/sec in moving water):
3 seconds

Explosionproof and Flameproof Ratings:
National and Canadian Electrical Code:
Class I, Division 1, Groups B, C, and D
Class II/III, Division 1, Groups E, F, and G
T5 (Ta=80°C), T6 (Ta=65°C)
National Electrical Code (Article 505):
Class I, Zone 1, AEx d IIC
T5 (Ta=80°C), T6 (Ta=65°C)
Canadian Electrical Code (IEC 60079):
Class I, Zone 1, Ex d IIC
T5 (Ta=80°C), T6 (Ta=65°C)
ATEX:
II 2 G Ex d IIC T5 (Ta= -50°C to 80°C),
T6 (Ta= -50°C to 65°C) Gb

Explosionproof Sensor Assembly–Thermocouple, Quick Release Spring Loaded Fitting with Transmitter

dimensions

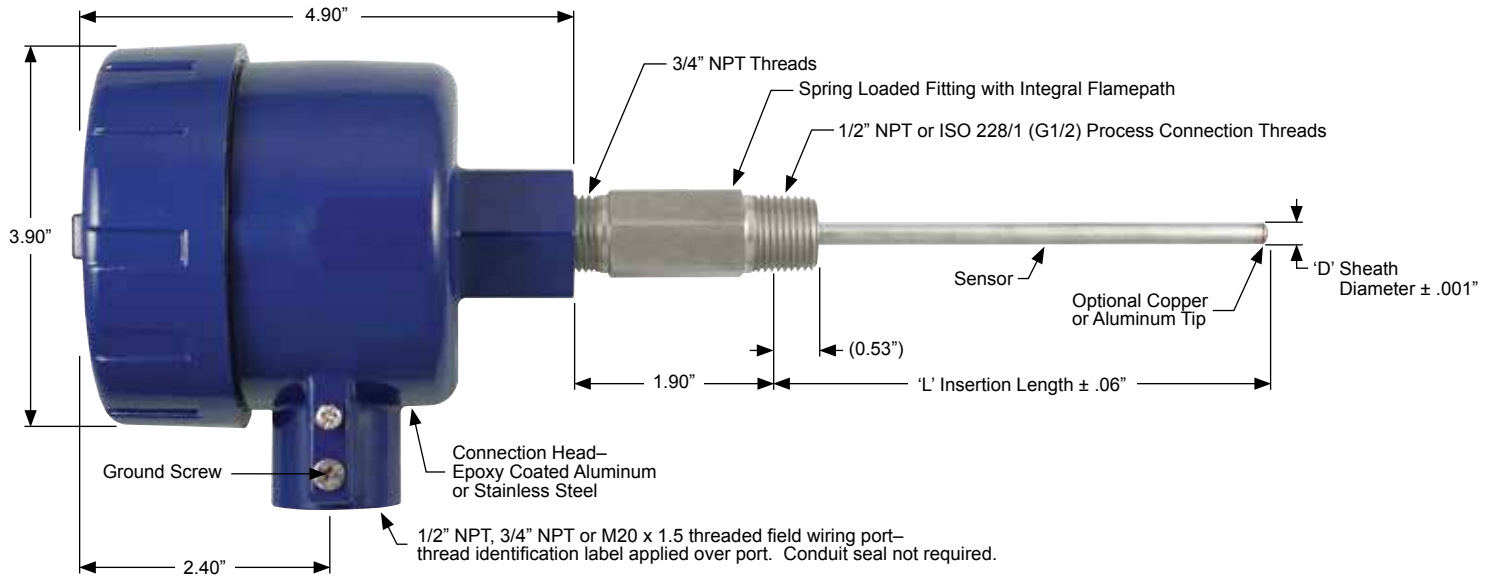

ordering info

Explosionproof Sensor Assembly–RTD, Quick Release Spring Loaded Fitting with Transmitter

Model	1023 Explosionproof Sensor Assembly–RTD, Quick Release Spring Loaded Fitting with Transmitter		
Junction Configuration	Single Model	Dual Model	Thermcouple Type
	T	TT	Type T
	J	JJ	Type J
	K	KK	Type K
	E	EE	Type E
Model	'L' Insertion Length		
---	Define 'L' Length in 0.1 Inch Increments. Minimum Length: 1.0 Inches / Maximum Length: 40.0 Inches		
Model	Connection Head (Fiberglass Terminal Block Included)		
R	Large Epoxy-Coated Aluminum Explosionproof		
S	Large Stainless Steel Explosionproof		
Model	Connection Head Conduit Thread		
4	1/2" NPT		
5	3/4" NPT		
6	M20 x 1.5 (Model 6 not for use in Canadian Divisions)		
Model	Extension Fitting		
F	Spring Loaded Quick Release Fitting (1/2" NPT Process)		
G	Spring Loaded Quick Release Fitting (G 1/2" Process)		
Model	Sheath Diameter		
B	.188" Diameter		
D	.215" Diameter		
E	.236" Diameter (6mm)		
C	.250" Diameter		
Model	Transmitter		
T	Programmable Analog Transmitter (One Transmitter Only on Dual Models)		
Model	Transmitter Minimum Temperature (4 mA Output)		
---	Define Temperature. Use 'N' to Define Negative Temperatures, 'P' to Define Positive Temperatures. (Example: N50= -50 Degrees)		
Model	Transmitter Maximum Temperature (4 mA Output)		
---	Define Temperature. Use 'N' to Define Negative Temperatures, 'P' to Define Positive Temperatures. (Example: P100= +100 Degrees)		
Model	Temperature Scale		
C	Degrees Celcius		
F	Degrees Fahrenheit		



联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com

www.bill-well.com

深圳市亿为测控电子有限公司