

M7100 Pressure Transducer



- Performance standard on and off highway engine and vehicle OEMs
- Rugged for heavy equipment and outdoor use
- Designed specifically for high volume applications
- Stainless Steel wetted surfaces
- Medium to extremely high pressures
- CE Approved
- UL Certified
- Gage and no-vent gage



DESCRIPTION

The M7100 pressure transducer from the Microfused™ line of MEAS sets a new price performance standard for demanding engine and vehicle, and industrial applications. This transducer is suitable for measurement of liquid or gas pressure, even for difficult media such as contaminated water, steam and corrosive fluids.

The transducer pressure cavity is machined from a solid piece of 17-4 PH stainless steel. The standard version includes a 1/4 NPT pipe thread allowing a leak-proof, all metal sealed system. There are no O-rings or organics exposed to the pressure media and the durability is excellent. This automotive grade pressure transducer with stainless steel hermetic pressure ports and integral electrical connector can boast up to 43,000psi (3000Bar). The M7100 is UL certified and exceeds the latest industrial CE requirements including surge protection and is overvoltage protected in both positive and reverse polarity.

FEATURES

- Hermetic Pressure Ports
- Integral Electrical Connector
- Survives High Vibration
- ±0.25% Accuracy
- Water Resistant 1M Immersion

APPLICATIONS

- On and Off Highway Engines and Vehicles
- HVAC Refrigeration Controls
- Compressors
- Hydraulics
- Energy and Water Management

STANDARD RANGES

Range	psiG	psiN	Range	BarG	BarN
0 to 150	•	•	0 to 010	•	•
0 to 200	•	•	0 to 014	•	•
0 to 300	•	•	0 to 020	•	•
0 to 500	•	•	0 to 035	•	•
0 to 01K	•	•	0 to 070	•	•
0 to 1K5	•	•	0 to 100	•	•
0 to 03K		•	0 to 200		•
0 to 05K		•	0 to 350		•
0 to 7K5		•	0 to 500		•
0 to 10K		•	0 to 700		•

For other pressure ranges, please consult factory.

M7100 Pressure Transducer

PERFORMANCE SPECIFICATIONS

Supply Voltage: 5V

Ambient Temperature: 25°C (unless otherwise specified)

PARAMETERS	MIN	TYP	MAX	UNITS	NOTES
Load Resistance	10			KΩ	
Accuracy (combined linearity, hysteresis & repeatability)	-0.25		0.25	%Span	1
Total Error Band	-1.0		1.0	%Span	2
Compensated Temperature	-20		+85	°C	
Operating Temperature	-40		+125	°C	3
Storage Temperature	-50		+125	°C	
Insulation Resistance (500Vdc)	100			MΩ	4
Short Circuit Protected		Yes			
Output Noise @ 1kHz		10		mV	
Long Term Stability	-0.25		0.25	%Span/Year	
Frequency Response @ -3dB		1		KHz	

Notes

1. Best fit straight line.
2. Over the compensated temperature range.
3. Transducer is functional, accuracy specified not guaranteed.
4. Between sensor body to any pins of connector.

ENVIRONMENTAL SPECIFICATIONS

Supply Voltage: 5V

Ambient Temperature: 25°C (unless otherwise specified)

PARAMETERS	MIN	TYP	MAX	UNITS	NOTES
Humidity (@40°C)			93	%RH	
Pressure Overload			2X	Rated	5
Pressure Burst			5X	Rated	6
Pressure Cycle	10M			Cycles	
Media, Pressure Port					Fluids compatible with 17-4PH Stainless Steel
Mechanical Vibration			20g, 10 ~ 2000Hz		MIL-STD-810C, Method 514.2, Curve L
Mechanical Shock			Half-Sine, Peak: 50g, 11ms		MIL-STD-202, Method 213B, Condition A
Package Protection			IP67 (IEC60529)		

Notes

5. The maximum pressure that can be applied without changing the transducer's performance or accuracy.
6. The maximum pressure that can be applied to a transducer without rupture of either the sensing element or transducer.


M7100 Pressure Transducer

Output Type vs. Supply

Output Type (Code)	3	4
Supply Voltage	4.75 ~ 5.25V*	8 ~ 32V
Supply Current	4.0 ~ 10.0mA	
Output Voltage	0.5 ~ 4.5V*	1.0 ~ 5.0V
Reverse Voltage	16V	
Overvoltage Protection	16V	32V

* Output ratiometric to supply voltage

CHART 1: PRESSURE TRANSFER FUNCTIONS

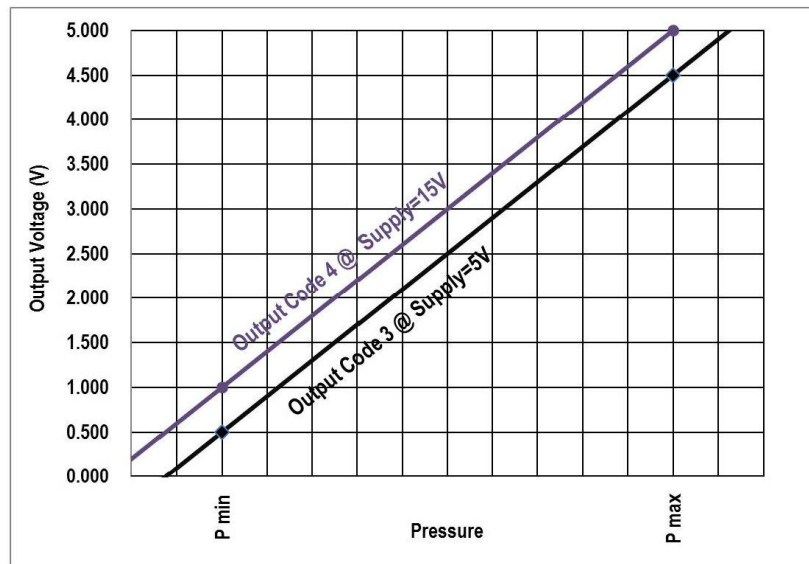

Output Code 3:
 Output Voltage = $\frac{80\% \times \text{Supply Voltage}}{P_{\text{max}} - P_{\text{min}}} \times (\text{Pressure applied} - P_{\text{min}}) + 0.500$

Output Code 4:
 Output Voltage = $\frac{4}{P_{\text{max}} - P_{\text{min}}} \times (\text{Pressure applied} - P_{\text{min}}) + 1.000$


Agency Approvals

RoHS	RoHS II Compliant
UL 508 Certified	Industrial Control Equipment, CSA22.2 No. 14-10
EMC Performance Criteria	Output Change $\leq \pm 1.5\%$ FSO
IEC61000-4-2 ESD	8kV Contact / 15kV Air; Discharge Rate > 10s
IEC61000-4-3 EM Field	100V/m, 1kHz 80% Modulation, 80~1000MHz
IEC61000-4-4 Electrical Fast Transient	Level 2, 1KV each line, Capacitance Coupling
IEC61000-4-5 Surge	Level 2, 42Ω Impedance, Figure 11 (L-L 500V, L-E 1KV)
IEC61000-4-6 Conducted RF	Level 2, 3V/130dB, 150KHz~80MHz, 2s Dwell, Clamp Injection
IEC61000-4-9 Pulsed Magnetic Field	Level 3, 100A/m, 10 Second Pulse Interval
IEC55022 Emission	Class B, 30dB @ 30~220MHz, 37dB @ 230~1000MHz

M7100 Pressure Transducer

DIMENSIONS

DIMENSION ARE IN INCHES [mm]

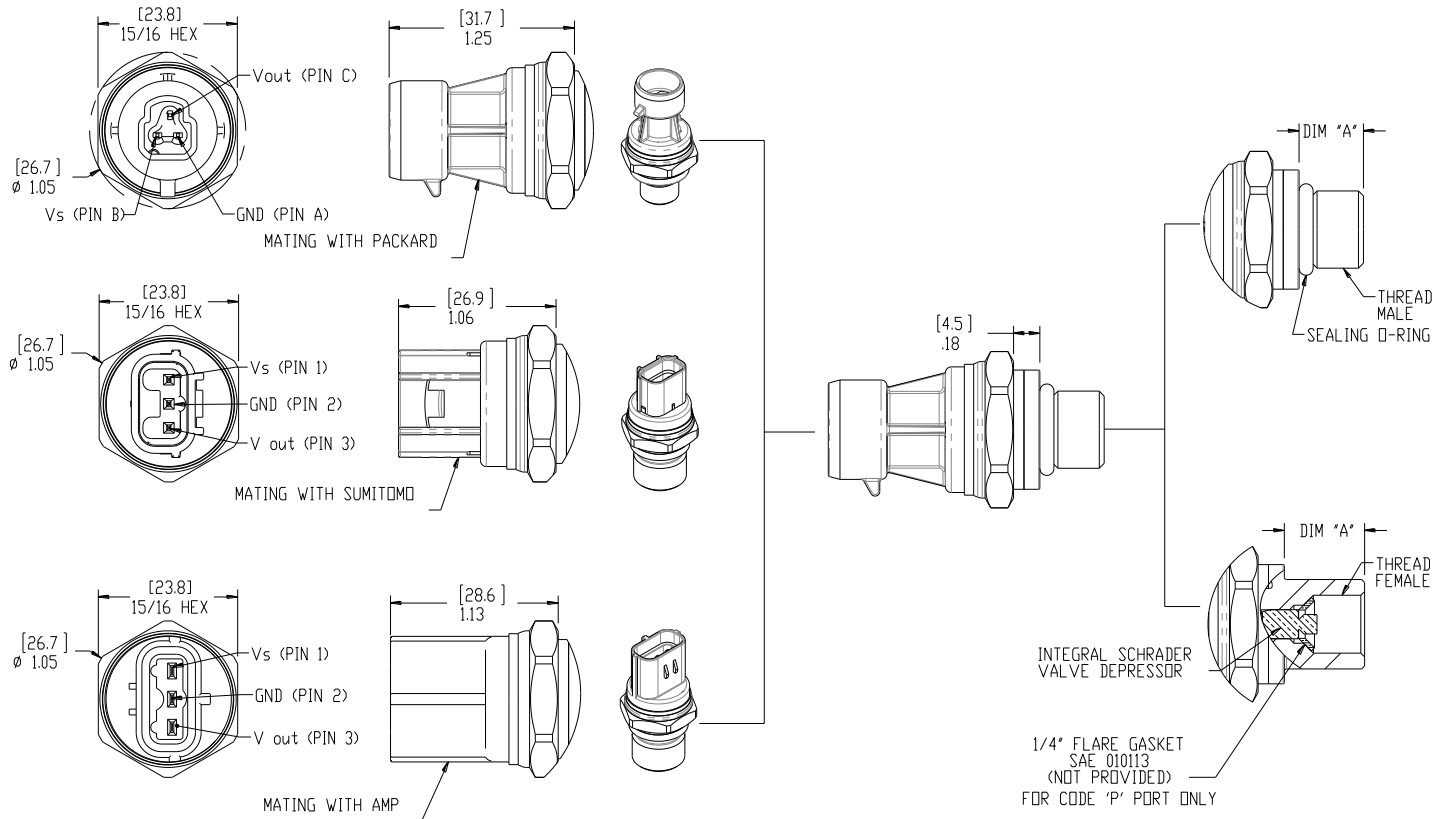

Connector	Vendor	Pin Plating	Mating Connector
Packard Metri-Pack 150 Series	powerandsignal.com	0.003 – 0.005mm Sn	Housing P/N: 12065287 Terminals P/N: 12103881
Sumitomo HV040 Series	sumitomokenki.com	0.003mm Sn over 0.0005 – 0.001mm Cu	Housing P/N: 6189-6907 Terminals P/N: 8100-3067/8
AMP Econoseal-J Mark II 070 Series	te.com	0.0004 mm Au over 0.0013 mm Ni	Housing P/N: 174357 Terminals P/N: 171630

Note: Connector
Do not apply torque to the connector housing of transducer.
To ensure proper environmental sealing and electrical connections when using a mating connector, follow the connector manufacturer's installation guidelines.

Pressure Port Options	Dim A (inches) [mm]	Tightening Torque (Nm)
2 = G1/, BS5380, Male	.43[11.0]	30~35
4 = 7-16-20 UNF, SAE J1926-2, Male, w/ O-Ring	.43[11.0]	18~20
5 = 1/4-18 NPT Male	.56[14.2]	2~3 T.F.F.T.*
6 = 1/8-27 NPT Male	.38[9.7]	2~3 T.F.F.T.*
G = M14x1.5, ISO 6149-2, Male	.43[11.0]	30~35
P = 7/16-20UNF Female w/ Integral Valve Depressor; 1/4 Flare Gasket SAE J513C, Copper	.54[13.7]	15~16
Q = M10x1.0, ISO 6149-2, Male	.37[9.5]	15~16


Others pressure ports available upon request
*T.F.F.T. Turns From Finger Tight

Notes: Installation
Transducers can be installed by either spanner or deep socket. Values provided are for reference; actual torque depends upon mating port material, surface finish, lubrication and sealing mechanism. Transducer calibration and/or zero may shift if it is over-torqued when installing. Check for a zero shift after installing.

M7100 Pressure Transducer

ORDERING INFORMATION

M7138-300PG-200000

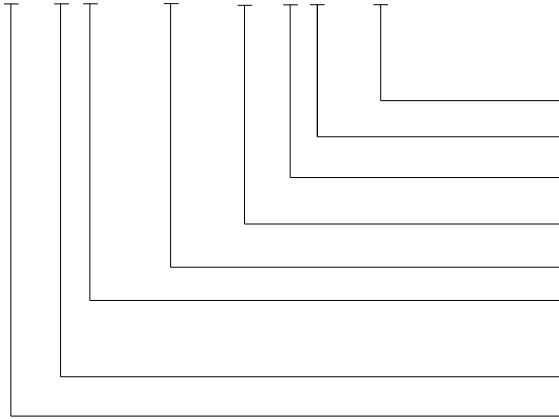

Specials (nnnn = Custom Drawing)

Port Material (0 = 17-4PH SST)

Pressure Port (See Pressure Port Options Table)

Type (G = Gage, N = No Vent Gage)

Pressure Range (See Pressure Range Table)

Connection (7 = AMP Connector, 8 = Sumitomo Connector HV040,
9 = Packard Connector [Supply; PIN B])

Output (3 = 0.5 - 4.5V, 4 = 1 - 5V)

Model

联系方式



深圳市亿为测控电子有限公司
Shenzhen Bill-Well Measurement & Control Electronics Co., Ltd.

广东省深圳市南山区创业路怡海广场东座2407 邮编：518000

电话：+86 755 2641 9890 传真：+86 755 2641 9680

电子邮箱：sales@bill-well.com